



PRODUCT NAME: WILLOW


ITEM NUMBER: 26284ICSG

Please consult your electrician for hanging fixture and wiring.



G9 8X40W (Bulb included)

IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation.



Mounting Strap (A)



Body (B)



Canopy (C)





Nut (D)




Bulb (F)

Locate all hardware & components before discarding packaging

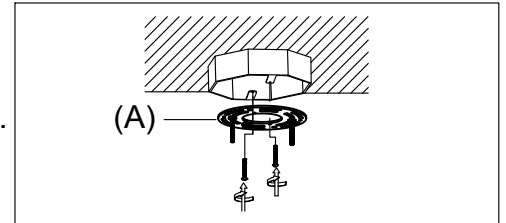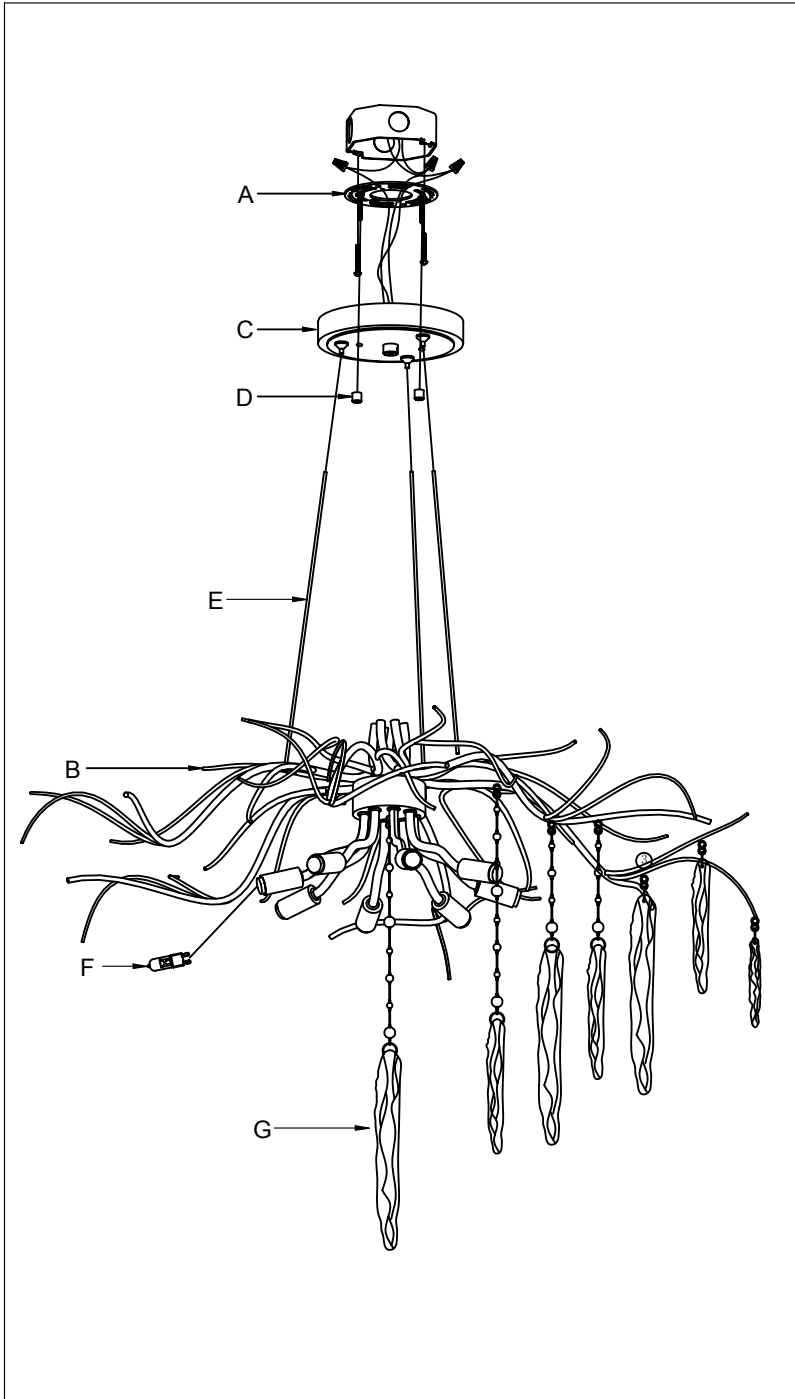


1.

Step.1 Remove mounting bracket (A) from fixture and install to electrical box.

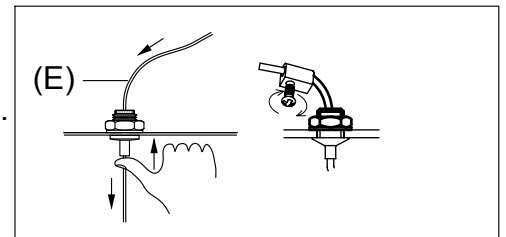


2.

Step.2 Press the wire restraint to adjust the desired length of cable. Secure the cables.

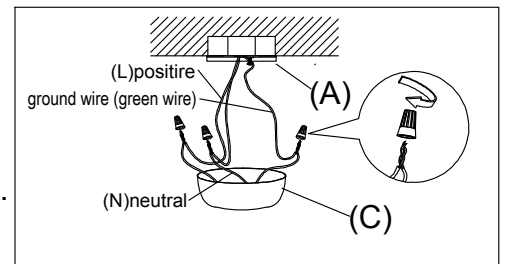

3.

Step.3 Wire fixture to wires in outlet box. Green wire is fo Ground.


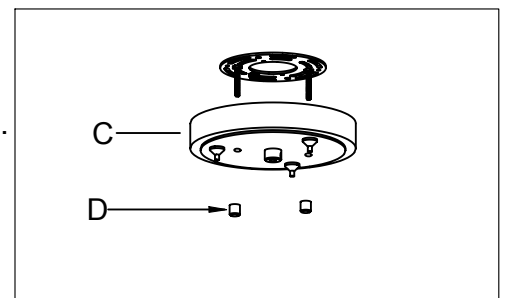








4.

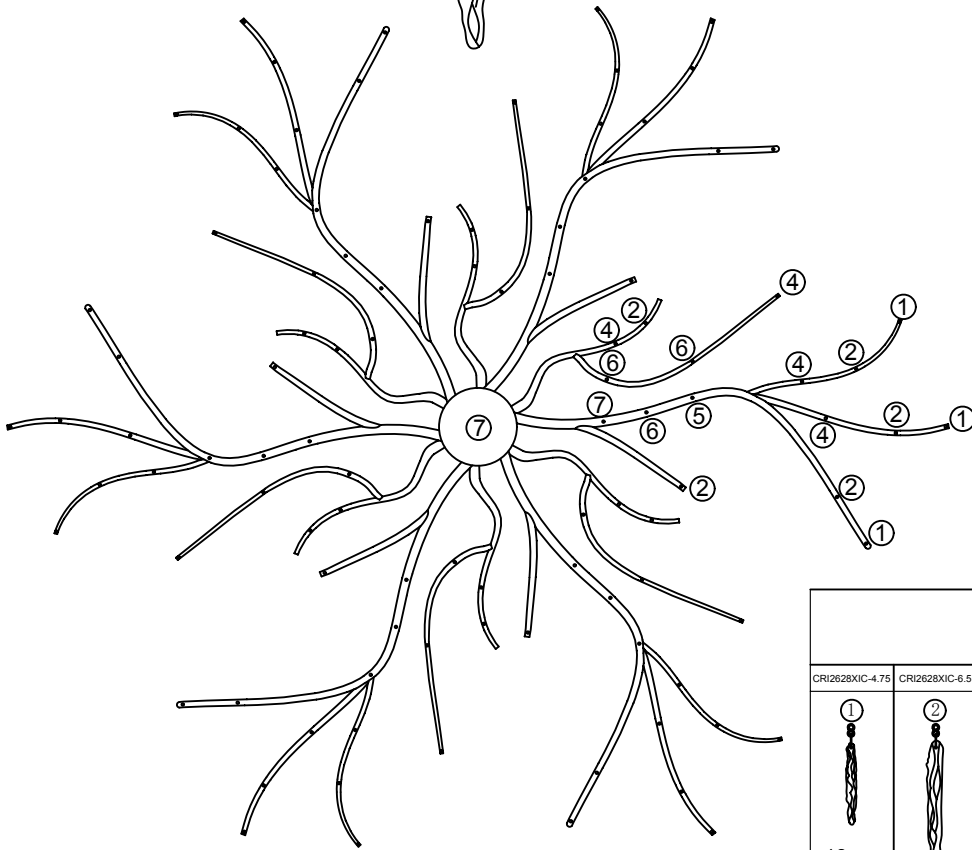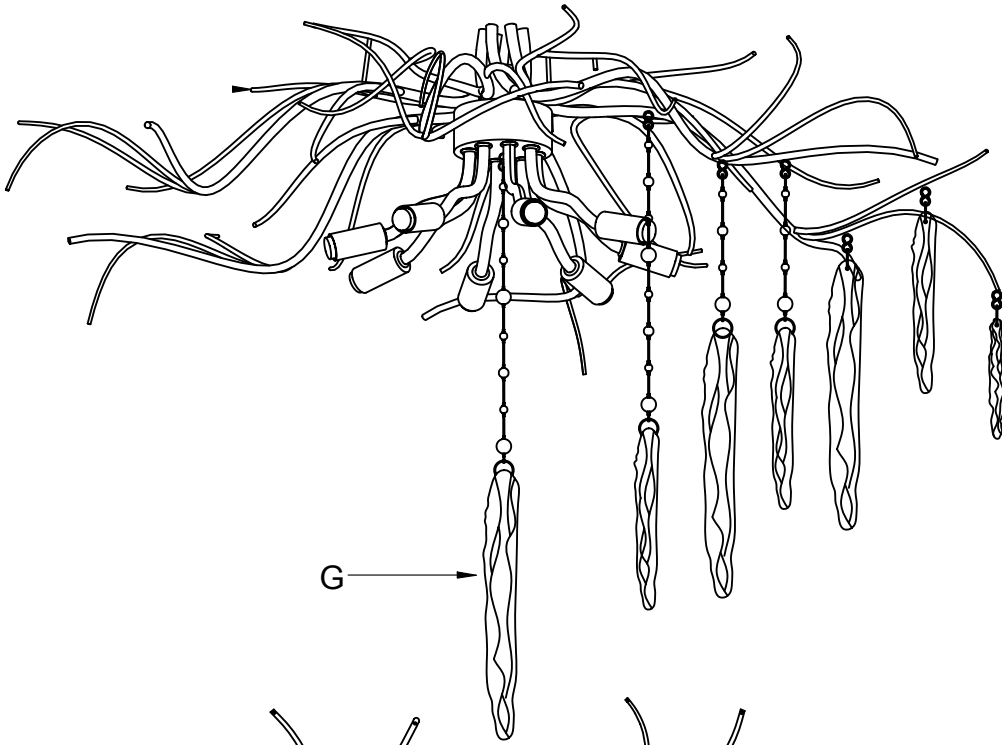Step.4 Install body (B) to Mounting Strap (A) and tighten Screw (D) through the hole of canopy (C) on the Mounting Strap (A).

Cleaning & Care:
Clean with soft cloth and a mild detergent.
Do not use abrasive cleaner.

IMPORTANT: Glass mounting



G					
CRI2628XIC-4.75	CRI2628XIC-6.5	CRI2628XIC-11	CRI2628XIC-14	CRI2628XIC-16	CRI2628XIC-18.75
① 	② 	④ 	⑤ 	⑥ 	⑦ 
18pcs	30pcs	24pcs	6pcs	18pcs	7pcs