



## Please consult your electrician for hanging fixture and wiring.

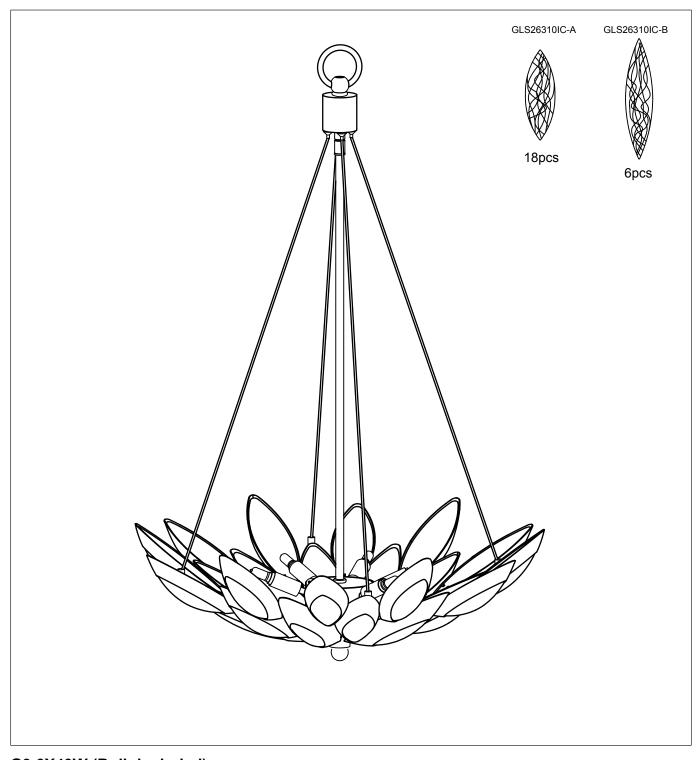


G9 6X40W (Bulb included)


## IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation.

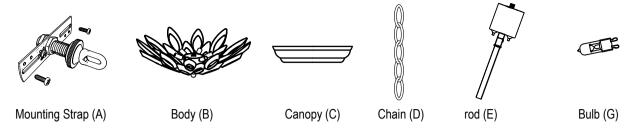


## Locate all hardware & components before discarding packaging

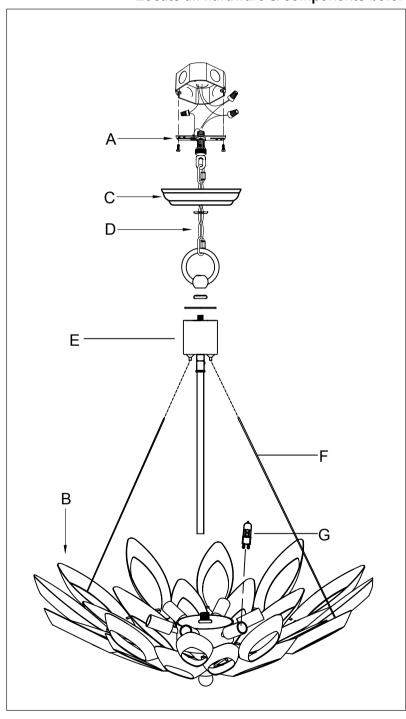


Cleaning & Care: Clean with soft cloth and a mild detergent. Do not use abrasive cleaner.




Step.1: Remove mounting bracket (A) from fixture and install to electrical box.




Step.2: Press the wire restraint to adjust the desired length of cable. Secure the cables.



Step.3: Install fixture loop. Connect chain (D) to fixture loop and screw collar loop with key link. Thread fixture wire through the chain (D) into outlet box.



Step.4: Wire fixture to wires in outlet box. Green wire is fo Ground.



Step.5: Raise Canopy (C) to ceiling and secure with screw collar ring.