

# FLUORESCENT WALL MOUNT FIXTURE ASSEMBLY & INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

## CAUTION

Turn off the main power at the circuit breaker before installing the fixture, In order to prevent possible shock.

## GENERAL

All electrical connections must be in accordance with local and national electrical code (N.E.C) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instruction.


## ASSEMBLY AND INSTALLATION

1. Take the acrylic lens (17) out from the fixture. And then take the tube (16) out from the socket.
2. Fasten mounting strap (5) to junction box (2) with screws (11). Turn nipple (12) into threaded hole in mounting strap. Turn hex nut onto nipple.
3. Make the wiring connections: connect the white supply wire (3) to the white fixture wire (6). Connect the black supply wire (1) to the black fixture wire (7) using wire connectors. Wrap the house ground wire (bare) (8) and ground wire (13) around the green ground screw (10) on the mounting strap and tighten.

**NOTE: If there is No bare house ground wire, but the junction box in the ceiling is made of metal, verify that the box itself is connected to the house ground system. If so, No other ground connections need to be made.**

4. Carefully tuck all wires back into the junction box. Position the canopy so the nipple protrudes through the center hole and secure with The knob (15) provided.
5. Install the proper lamps. Put the acrylic lens back to the fixture.

## INSTALLATION IS NOW COMPLETED

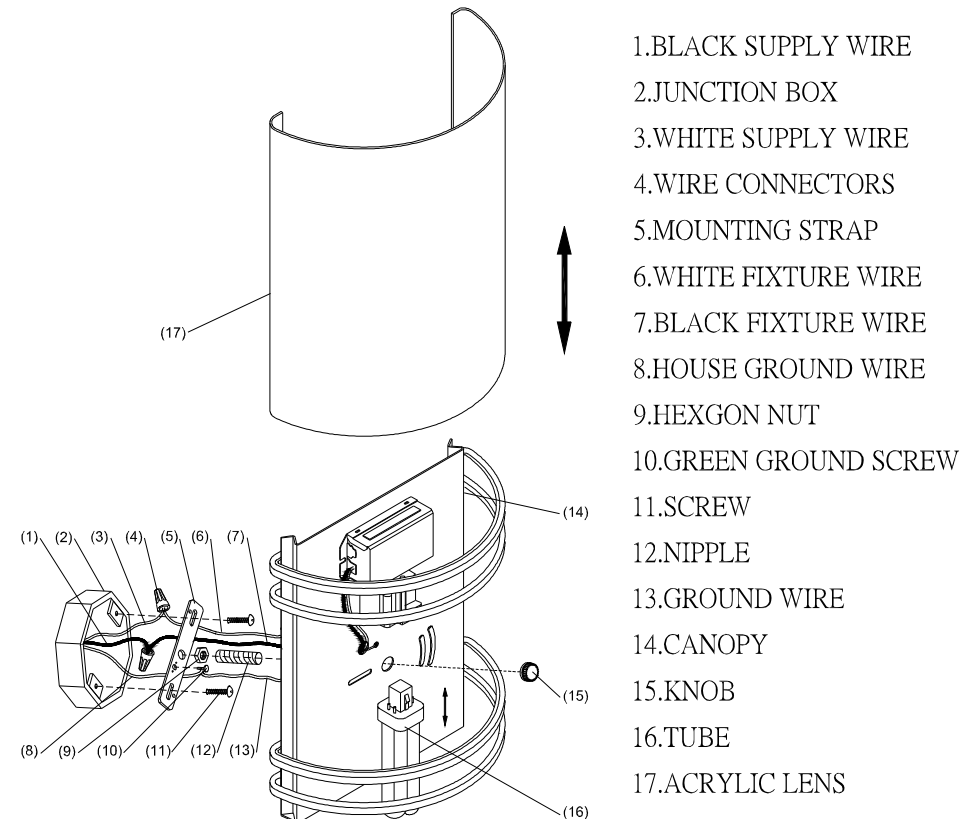

RKT060 A