


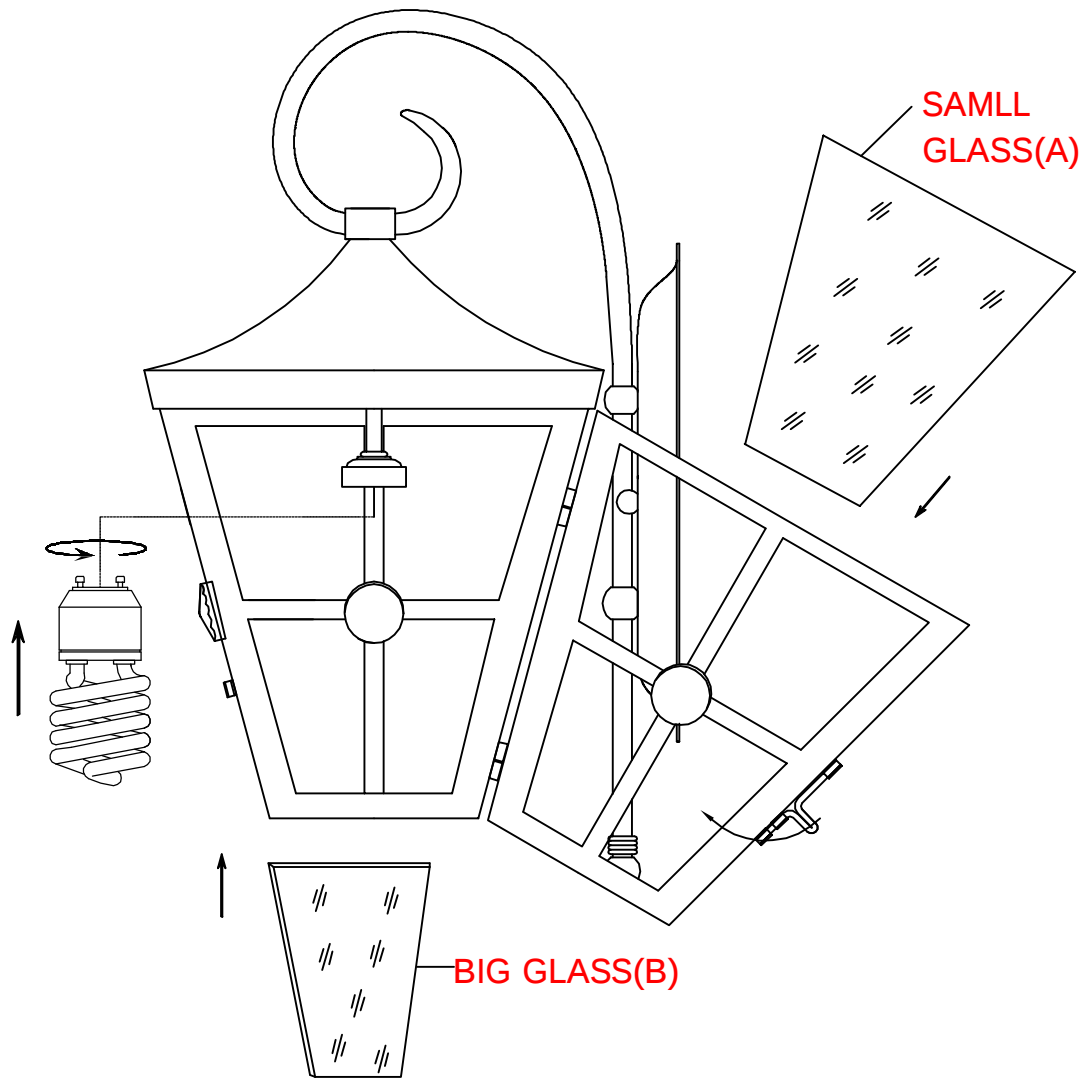

NOTE:

1. INSERT THE SMALL GLASS(A) INTO THE DOOR .
2. THEN INSERT THE BIG GLASS(B) INTO THE FIXTURE .
3. SCREW BULB INTO THE SOCKET - -MAX 26 WATT TYPE GU24.

Warning:

To prevent water intrusion, caulk around back-plate where fixture meets the wall using outdoor silicone sealant.