

# TRIM | 0-10V LED FLUSH MOUNT

57880 | 57881 | 57882 | 57883 | 57884 | 57885 | 57894 | 57895

- Die Cast Aluminum
- Size options between 5", 7" and 9"
- Ultra-thin 1" height with less than 1/4" trim
- Available in 3000k (Other CCT available on request)
- Suitable for Closets according to NEC Section 410.8 & 410.16
- Available in White (WT), Black (BK), Polished Chrome (PC) and Satin Nickel (SN)
- Easy to install: fits in 3-0 and 4-0 Outlet Box
- Pendant light accessory available (sold separately)
- Black-Lit LED Technology
- Suitable for Wet Location, for use on ceilings outdoor and above showers
- Dimmable with 0-10V, Triac or ELV Dimmers
- ETL/cETL

Job Name : \_\_\_\_\_  
 Job Type : \_\_\_\_\_  
 Quantity : \_\_\_\_\_  
 Comments : \_\_\_\_\_



Trim LED 7"  
 \*Emergency Back up



(57894WTWT)



(57895WTWT)


Accessory  
 Empty EM 7" Shell



(57890WT)

## PRODUCT DESCRIPTION

Thin discs of evenly illuminated LED create the impression of recessed lighting. The die-cast aluminum housings are available in White, Black, Satin Nickel, and Polished Chrome all with a thoughtfully recessed White polycarbonate diffuser. High efficiency and good color rendering make this a perfect choice for your next project. Use the optional pendant adapter to convert any size to a hanging fixture.

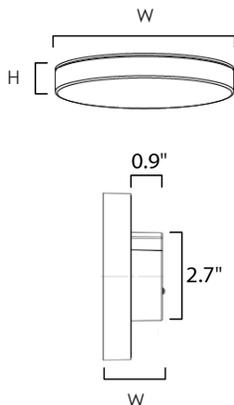

## MEASUREMENTS

| MODEL   | DIMENSION    |
|---------|--------------|
| 57880   | 5" W x 0.5"H |
| 57881   | 5" W x 0.5"H |
| 57882   | 7" W x 0.5"H |
| 57883   | 7" W x 0.5"H |
| 57884   | 9" W x 0.5"H |
| 57885   | 9" W x 0.5"H |
| * 57894 | 7" W x 2"H   |
| * 57895 | 7" W x 2"H   |

## LAMPING

| MODEL   | WATTAGE & TYPE         | COLOR TEMP | CRI | INPUT    | DIMMABLE | LUMENS |      |
|---------|------------------------|------------|-----|----------|----------|--------|------|
|         |                        |            |     |          |          | RATED  | DEL  |
| 57880   | 12.5W LED (Integrated) | 3000K      | 90+ | 120-277V | 0-10V    | 1250   | 1000 |
| 57881   | 12.5W LED (Integrated) | 4000K      | 90+ | 120-277V | 0-10V    | 1250   | 1000 |
| 57882   | 15W LED (Integrated)   | 3000K      | 90+ | 120-277V | 0-10V    | 1600   | 1300 |
| 57883   | 15W LED (Integrated)   | 4000K      | 90+ | 120-277V | 0-10V    | 1600   | 1300 |
| 57884   | 18W LED (Integrated)   | 3000K      | 90+ | 120-277V | 0-10V    | 2000   | 1600 |
| 57885   | 18W LED (Integrated)   | 4000K      | 90+ | 120-277V | 0-10V    | 2000   | 1600 |
| * 57894 | 15W LED (Integrated)   | 3000K      | 90+ | 120-277V | 0-10V    | 1750   | 1400 |
| * 57895 | 15W LED (Integrated)   | 4000K      | 90+ | 120-277V | 0-10V    | 1750   | 1400 |

\* EMERGENCY BACK-UP BATTERY INCLUDED MINIMUM 15 HOURS FOR FULL CHARGE. LASTS 1.5 HOURS ON BATTERY

## FINISH OPTIONS

- Black (BK)
- Satin Nickel (SN)
- White (WT)



## DIFFUSER

White Polycarbonate

## MATERIAL

Polycarbonate + Aluminum

## AVAILABLE SIZES

5" | 7" | 9"

## RATINGS & CERTIFICATIONS

cETLus  
 Wet Location  
 Energy Star  
 JA8 Listed



## ADDITIONAL

RATED LIFE 50000 Hours  
 OPERATING TEMPERATURE:  
 -20°C (-4°F), 40°C (104°F)  
 WIRE LENGTH: 8" L

PHOTOMETRIC:  
 Report Found Online

Always consult a qualified electrician before installing any lighting product



WESTERN DISTRIBUTION CENTER (HEADQUARTER)  
 253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746

EASTERN DISTRIBUTION CENTER  
 101 GARDNER PARK | PEACHTREE CITY, GA 30269

P. 626.956.4200 | F. 626.956.4225 | maximlighting.com