
LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.11V I:0.2410A P:26.419W PF:0.9128 Freq:59.98Hz Lamp Flux:1578.81x1 lm		
NAME: 57596WTWT 26W 30K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


DATA OF LAMP		PHOTOMETRIC DATA Eff: 59.76 lm/W			
MODEL	3000K	Imax(cd)	525.6	S/MH(C0/180)	1.30
NOMINAL POWER(W)	26	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1578.8	η UP,DN(C0-180)	1.1,47.8
NOMINAL FLUX(lm)	1578.81	CIE CLASS	DIRECT	η UP,DN(C180-360)	1.1,50.0
LAMPS INSIDE	1	η up(%)	2.2	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120	η down(%)	97.8	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

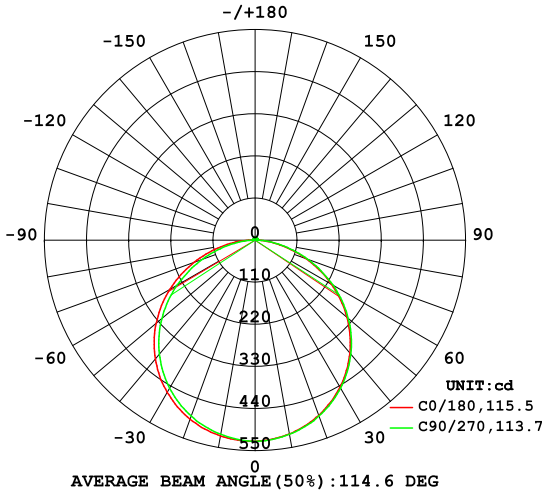

AVERAGE BEAM ANGLE(50%):114.6 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

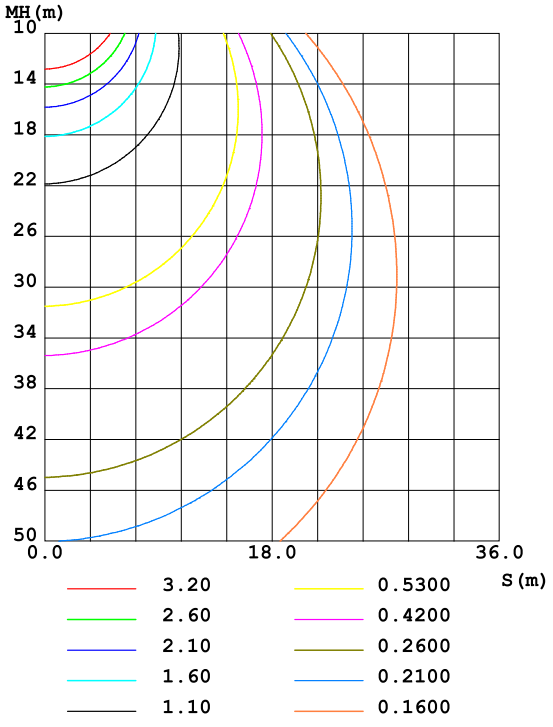

C Range: 0 - 180DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:03 August 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:7.382m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C90	C180	C270					γ	Φ zone	Φ total	%lum,lamp
10	514.0	515.3	519.4	515.3					0- 10	49.68	49.68	3.15,3.15
20	487.0	488.9	497.5	488.9					10- 20	142.7	192.3	12.2,12.2
30	443.2	446.6	459.2	446.6					20- 30	217.4	409.8	26,26
40	385.2	389.0	405.7	389.0					30- 40	264.3	674.0	42.7,42.7
50	313.0	317.9	337.0	317.9					40- 50	276.4	950.5	60.2,60.2
60	230.2	235.5	256.9	235.5					50- 60	251.6	1202	76.1,76.1
70	141.9	146.1	169.3	146.1					60- 70	193.0	1395	88.4,88.4
80	58.62	62.91	82.52	62.91					70- 80	113.7	1509	95.6,95.6
90	3.947	3.999	11.83	3.999					80- 90	35.34	1544	97.8,97.8
100	4.432	4.478	4.316	4.478					90-100	4.744	1549	98.1,98.1
110	4.969	5.016	4.847	5.016					100-110	4.964	1554	98.4,98.4
120	5.462	5.513	5.341	5.513					110-120	5.173	1559	98.7,98.7
130	5.899	5.955	5.798	5.955					120-130	5.092	1564	99.1,99.1
140	6.296	6.334	6.192	6.334					130-140	4.716	1569	99.4,99.4
150	6.689	6.705	6.585	6.705					140-150	4.066	1573	99.6,99.6
160	7.118	7.136	7.035	7.136					150-160	3.184	1576	99.8,99.8
170	7.449	7.499	7.414	7.499					160-170	2.066	1578	100,100
180	7.586	7.618	7.604	7.618					170-180	0.7189	1579	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 813.06 lm

%lum = 51.5%
%lamp = 51.5%

Conical surface Flux(130deg): 1307.6 lm

%lum = 82.8%
%lamp = 82.8%

C Range: 0 - 180DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:03 August 2024


γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:7.382m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.11V I:0.2410A P:26.419W PF:0.9128 Freq:59.98Hz Lamp Flux:1578.81x1 lm		
NAME: 57596WTWT 26W 30K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

LUMINANCE LIMITATION CURVES

GLARE	CLASS	ILLUMINANCE (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
		a	b	c	d	e	f	g	h

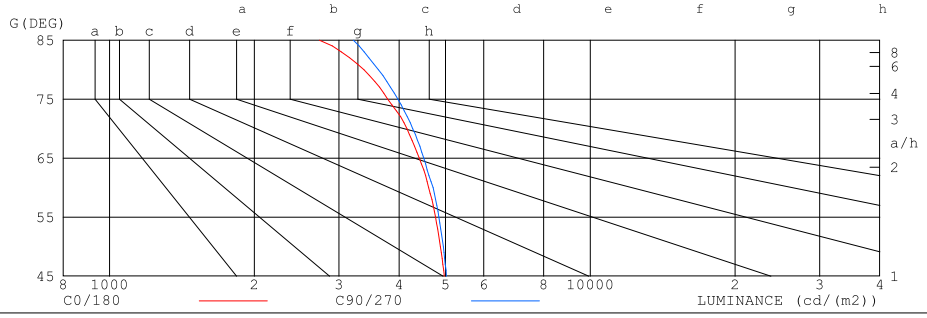

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	2732	3216
80	3381	3622
75	3789	3980
70	4154	4272
65	4409	4503
60	4611	4708
55	4765	4842
50	4877	4943
45	4965	5021

C Range: 0 - 180DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:03 August 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:7.382m [K=1.0000]
Remarks:


CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.11V I:0.2410A P:26.419W PF:0.9128 Freq:59.98Hz Lamp Flux:1578.81x1 lm		
NAME: 57596WTWT 26W 30K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.00	1.00	1.00	.98
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.89	.86	.88	.86	.84	.81
2.0	.90	.83	.77	.87	.81	.76	.84	.78	.74	.80	.75	.72	.77	.73	.70	.67
3.0	.78	.70	.64	.77	.69	.63	.73	.67	.61	.70	.65	.60	.68	.63	.59	.56
4.0	.69	.60	.54	.68	.60	.53	.65	.58	.52	.63	.56	.51	.60	.55	.50	.48
5.0	.62	.53	.46	.61	.52	.46	.58	.51	.45	.56	.49	.44	.54	.48	.44	.41
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.39	.51	.44	.39	.49	.43	.38	.36
7.0	.50	.42	.35	.49	.41	.35	.48	.40	.35	.46	.39	.34	.45	.39	.34	.32
8.0	.46	.37	.31	.45	.37	.31	.44	.36	.31	.42	.36	.31	.41	.35	.30	.28
9.0	.42	.34	.28	.41	.34	.28	.40	.33	.28	.39	.32	.28	.38	.32	.27	.25
10.0	.39	.31	.26	.38	.31	.25	.37	.30	.25	.36	.30	.25	.35	.29	.25	.23

LAMPS

LUMINAIRE BUDGETARY DIAGRAM

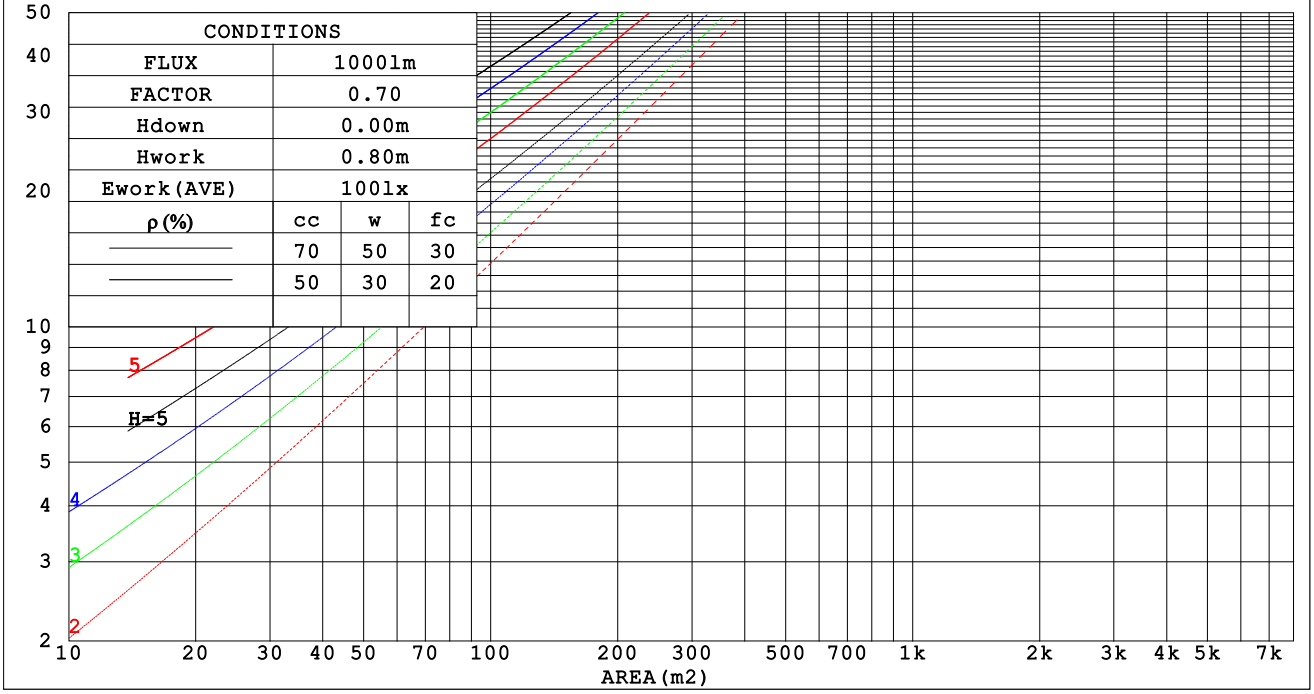

C Range: 0 - 180DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:03 August 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:7.382m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.11V I:0.2410A P:26.419W PF:0.9128 Freq:59.98Hz Lamp Flux:1578.81x1 lm		
NAME: 57596WTWT 26W 30K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coeffcients(WEC)									
0.0																
1.0	.315	.179	.057	.308	.175	.056	.293	.168	.054	.280	.161	.052	.267	.155	.050	
2.0	.295	.162	.050	.288	.159	.049	.275	.153	.048	.263	.148	.046	.252	.143	.045	
3.0	.272	.145	.043	.266	.143	.043	.255	.138	.042	.244	.134	.041	.234	.130	.040	
4.0	.251	.130	.038	.245	.128	.038	.235	.125	.037	.226	.121	.037	.217	.118	.036	
5.0	.231	.118	.034	.227	.116	.034	.218	.113	.033	.209	.110	.033	.201	.107	.032	
6.0	.214	.108	.031	.210	.106	.031	.202	.104	.030	.194	.101	.030	.187	.099	.029	
7.0	.199	.099	.028	.196	.097	.028	.188	.095	.027	.181	.093	.027	.175	.091	.027	
8.0	.186	.091	.026	.183	.090	.025	.176	.088	.025	.170	.086	.025	.164	.084	.025	
9.0	.174	.084	.024	.171	.083	.023	.165	.082	.023	.160	.080	.023	.154	.078	.023	
10.0	.164	.079	.022	.161	.078	.022	.156	.076	.021	.151	.075	.021	.146	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.207	.207	.207	.177	.177	.177	.121	.121	.121	.069	.069	.069	.022	.022	.022	
1.0	.198	.173	.151	.169	.148	.130	.116	.102	.090	.067	.059	.052	.021	.019	.017	
2.0	.190	.149	.115	.162	.128	.099	.111	.089	.069	.064	.052	.041	.021	.017	.013	
3.0	.182	.131	.091	.156	.113	.079	.107	.079	.055	.062	.046	.033	.020	.015	.011	
4.0	.174	.118	.075	.150	.102	.065	.103	.071	.046	.060	.042	.027	.019	.014	.009	
5.0	.167	.108	.064	.143	.093	.056	.099	.065	.039	.057	.038	.023	.018	.012	.008	
6.0	.160	.100	.056	.137	.086	.049	.095	.060	.035	.055	.035	.021	.018	.012	.007	
7.0	.153	.093	.050	.132	.080	.044	.091	.056	.031	.053	.033	.019	.017	.011	.006	
8.0	.147	.087	.046	.126	.075	.040	.087	.053	.028	.051	.031	.017	.016	.010	.006	
9.0	.140	.082	.043	.121	.071	.037	.084	.050	.026	.049	.030	.016	.016	.010	.005	
10.0	.135	.078	.040	.116	.068	.035	.081	.047	.025	.047	.028	.015	.015	.009	.005	

C Range: 0 - 180DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:03 August 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:7.382m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.11V I:0.2410A P:26.419W PF:0.9128 Freq:59.98Hz Lamp Flux:1578.81x1 lm		
NAME: 57596WTWT 26W 30K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.5	18.0	16.8	18.3	18.5	16.6	18.1	16.9	18.3	18.6
3H	18.0	19.4	18.3	19.7	19.9	18.1	19.5	18.4	19.7	20.0
4H	18.6	19.9	18.9	20.2	20.5	18.7	20.0	19.0	20.3	20.6
6H	19.0	20.2	19.3	20.5	20.9	19.1	20.4	19.5	20.7	21.0
8H	19.1	20.3	19.5	20.6	21.0	19.3	20.5	19.6	20.8	21.1
12H	19.2	20.3	19.5	20.6	21.0	19.4	20.5	19.7	20.8	21.2
4H 2H	17.1	18.4	17.5	18.7	19.0	17.2	18.5	17.5	18.8	19.1
3H	18.8	19.9	19.2	20.3	20.6	18.9	20.0	19.2	20.3	20.7
4H	19.5	20.5	19.9	20.9	21.3	19.6	20.6	20.0	21.0	21.4
6H	20.0	20.9	20.4	21.3	21.7	20.1	21.1	20.6	21.5	21.9
8H	20.2	21.0	20.6	21.5	21.9	20.3	21.2	20.8	21.6	22.1
12H	20.3	21.1	20.7	21.5	22.0	20.5	21.3	20.9	21.7	22.2
8H 4H	19.7	20.6	20.2	21.0	21.4	19.8	20.7	20.3	21.1	21.5
6H	20.4	21.1	20.9	21.6	22.1	20.5	21.3	21.0	21.7	22.2
8H	20.7	21.3	21.2	21.8	22.3	20.8	21.5	21.3	21.9	22.4
12H	20.8	21.4	21.4	21.9	22.4	21.0	21.6	21.6	22.1	22.6
12H 4H	19.7	20.5	20.2	21.0	21.4	19.8	20.6	20.3	21.1	21.5
6H	20.5	21.1	21.0	21.6	22.1	20.6	21.2	21.1	21.7	22.2
8H	20.8	21.3	21.3	21.8	22.3	20.9	21.5	21.4	22.0	22.5
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 1579 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.6)
Area: 0.1 m2

C Range: 0 - 180DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:03 August 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:7.382m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.11V I:0.2410A P:26.419W PF:0.9128 Freq:59.98Hz Lamp Flux:1578.81x1 lm		
NAME: 57596WTWT 26W 30K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	56	45	38	56	44	37	54	44	37	31
0.80	66	55	47	65	54	47	63	53	46	39
1.00	75	63	56	73	63	56	71	64	55	48
1.25	82	71	64	80	70	63	77	69	62	55
1.50	87	77	70	85	76	69	82	74	68	60
2.00	94	85	78	92	84	78	88	81	76	67
2.50	98	90	84	96	88	83	91	85	80	72
3.00	101	94	88	99	92	87	94	89	85	76
4.00	105	99	95	103	97	93	98	94	90	81
5.00	108	103	99	105	101	97	100	97	93	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended					SHRNOM = 1.25	

C Range: 0 - 180DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:03 August 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:7.382m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.11V I:0.2410A P:26.419W PF:0.9128 Freq:59.98Hz Lamp Flux:1578.81x1 lm		
NAME: 57596WTWT 26W 30K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

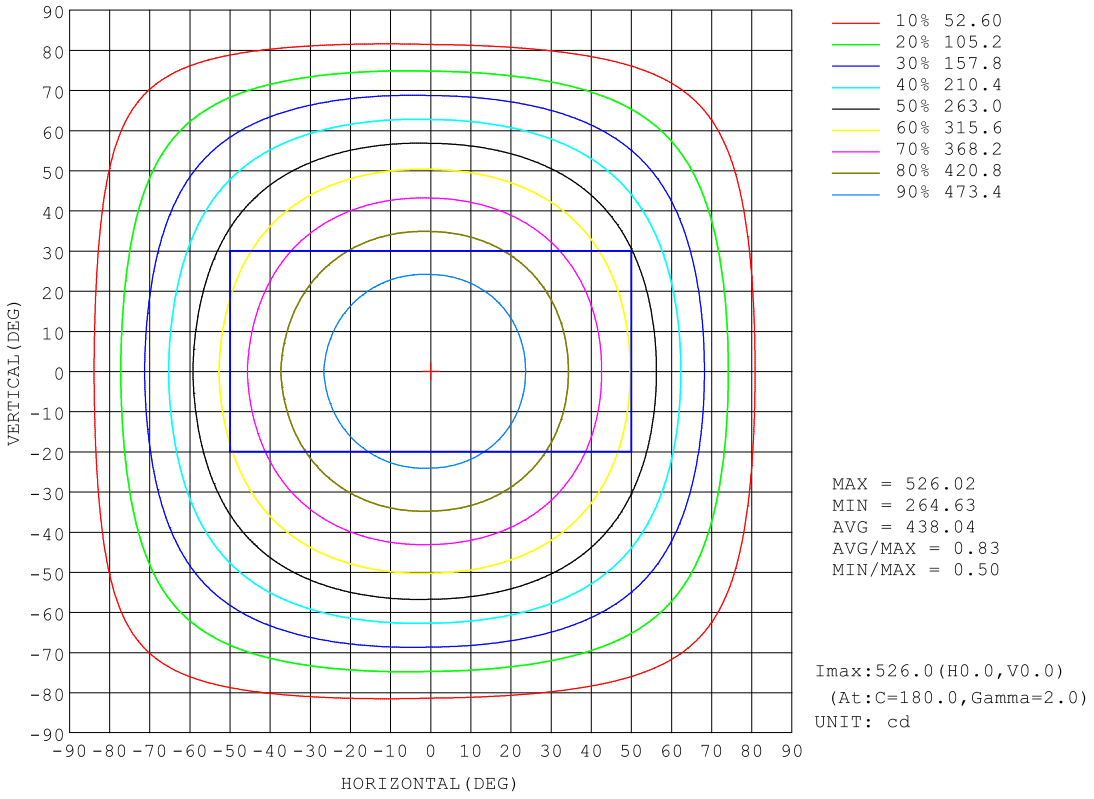


C Range: 0 - 180DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:03 August 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:7.382m [K=1.0000]
Remarks:

D:\测试数据\3-样品测试\LT\2024年\LT24211\FM11-375A-WH 26W 30K.GOS

AAI Figure

Test:U:120.11V I:0.2410A P:26.419W PF:0.9128 Freq:59.98Hz Lamp Flux:1578.81x1 lm		
NAME: 57596WTWT 26W 30K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

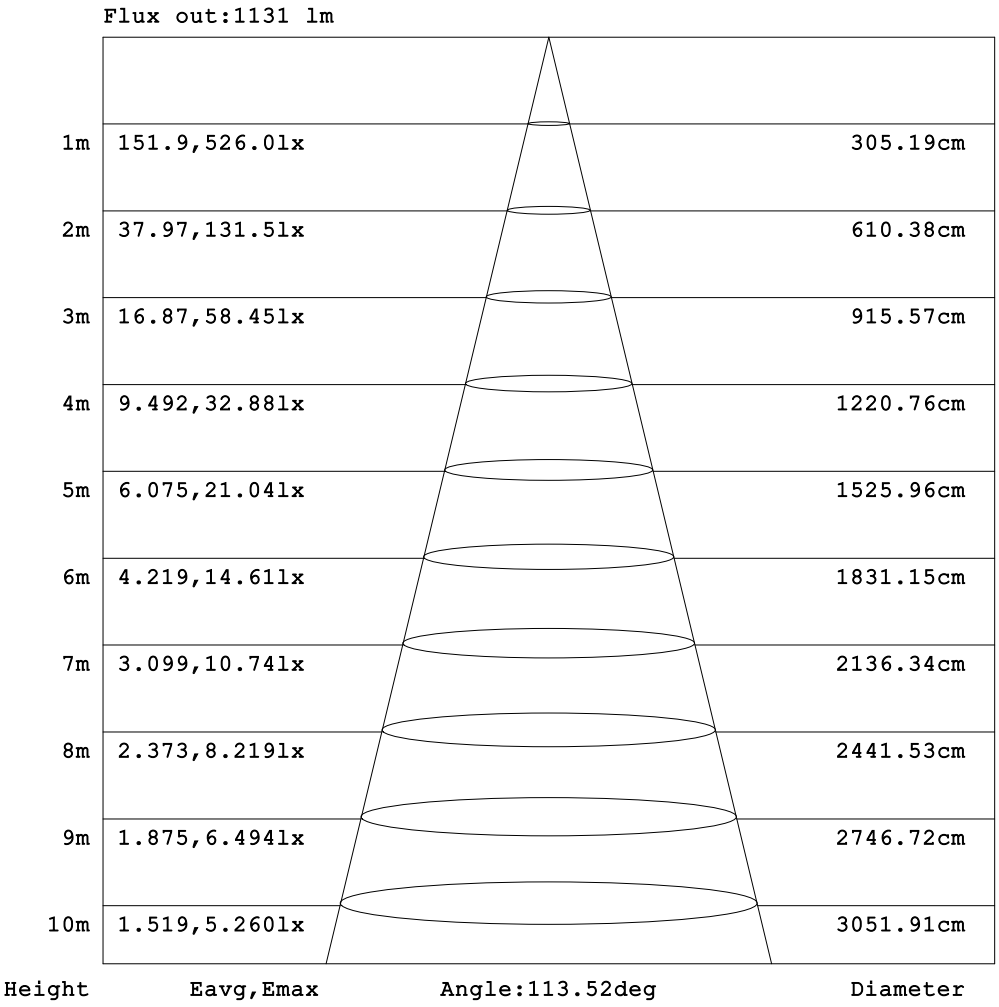


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 180DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:03 August 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:7.382m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.11V I:0.2410A P:26.419W PF:0.9128 Freq:59.98Hz Lamp Flux:1578.81x1 lm		
NAME: 57596WTWT 26W 30K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

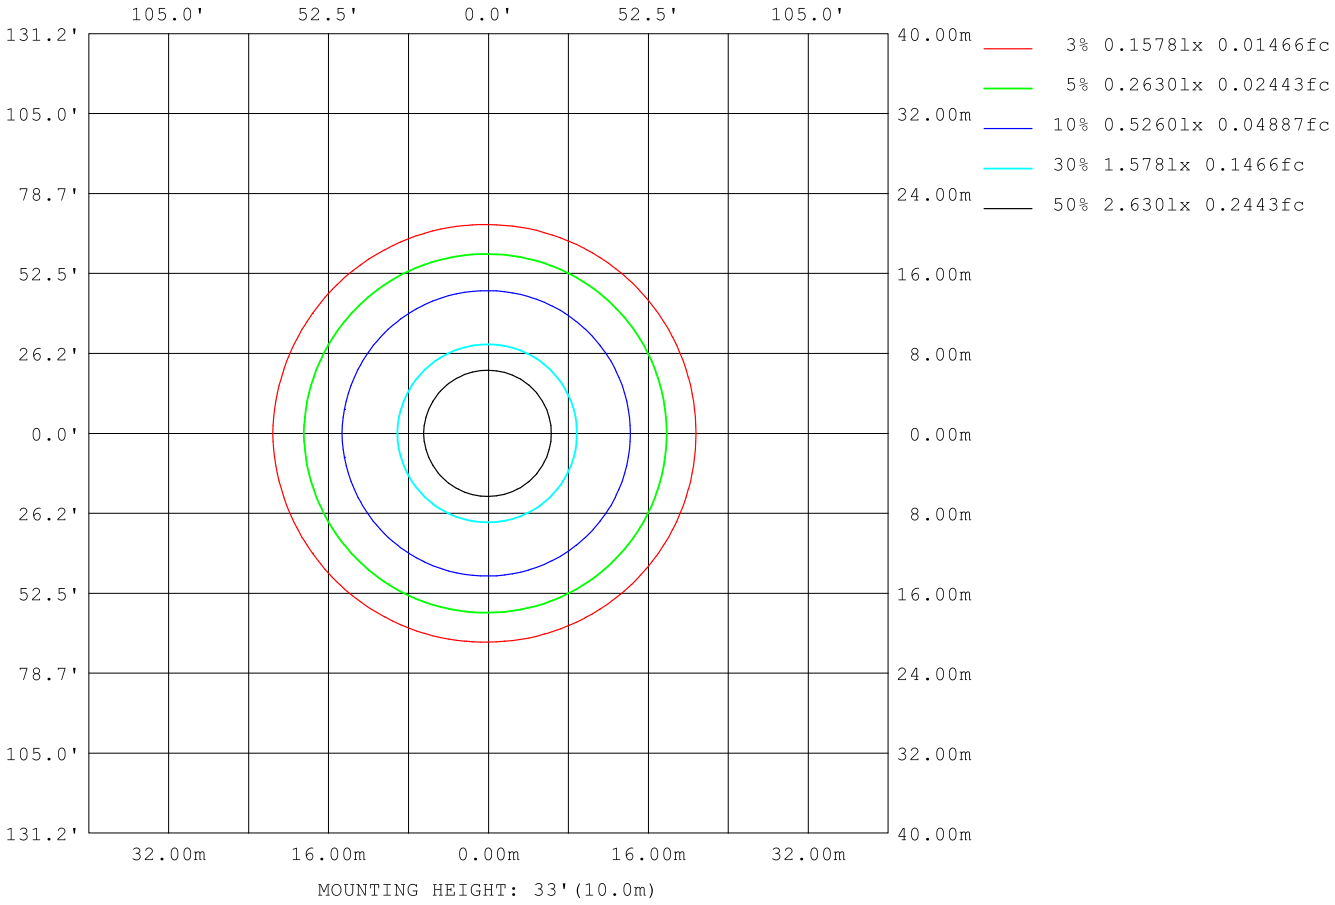

C Range: 0 - 180DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:03 August 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:7.382m [K=1.0000]
Remarks:

D:\测试数据\3-样品测试\LT\2024年\LT24211\FM11-375A-WH 26W 30K.GOS

LED Avg.L Report

Test:U:120.11V I:0.2410A P:26.419W PF:0.9128 Freq:59.98Hz Lamp Flux:1578.81x1 lm		
NAME: 57596WTWT 26W 30K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	4727
L_0~180(75)av	4302
L_0~180(85)av	3906
L_90~270(65)av	4504
L_90~270(75)av	3981
L_90~270(85)av	3217
L_45(65)av	4608
L_45(75)av	4134
L_45(85)av	3549

Standard: GB/T 29293-2012

C Range: 0 - 180DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:03 August 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:7.382m [K=1.0000]
Remarks:

Planar Illuminance Curve

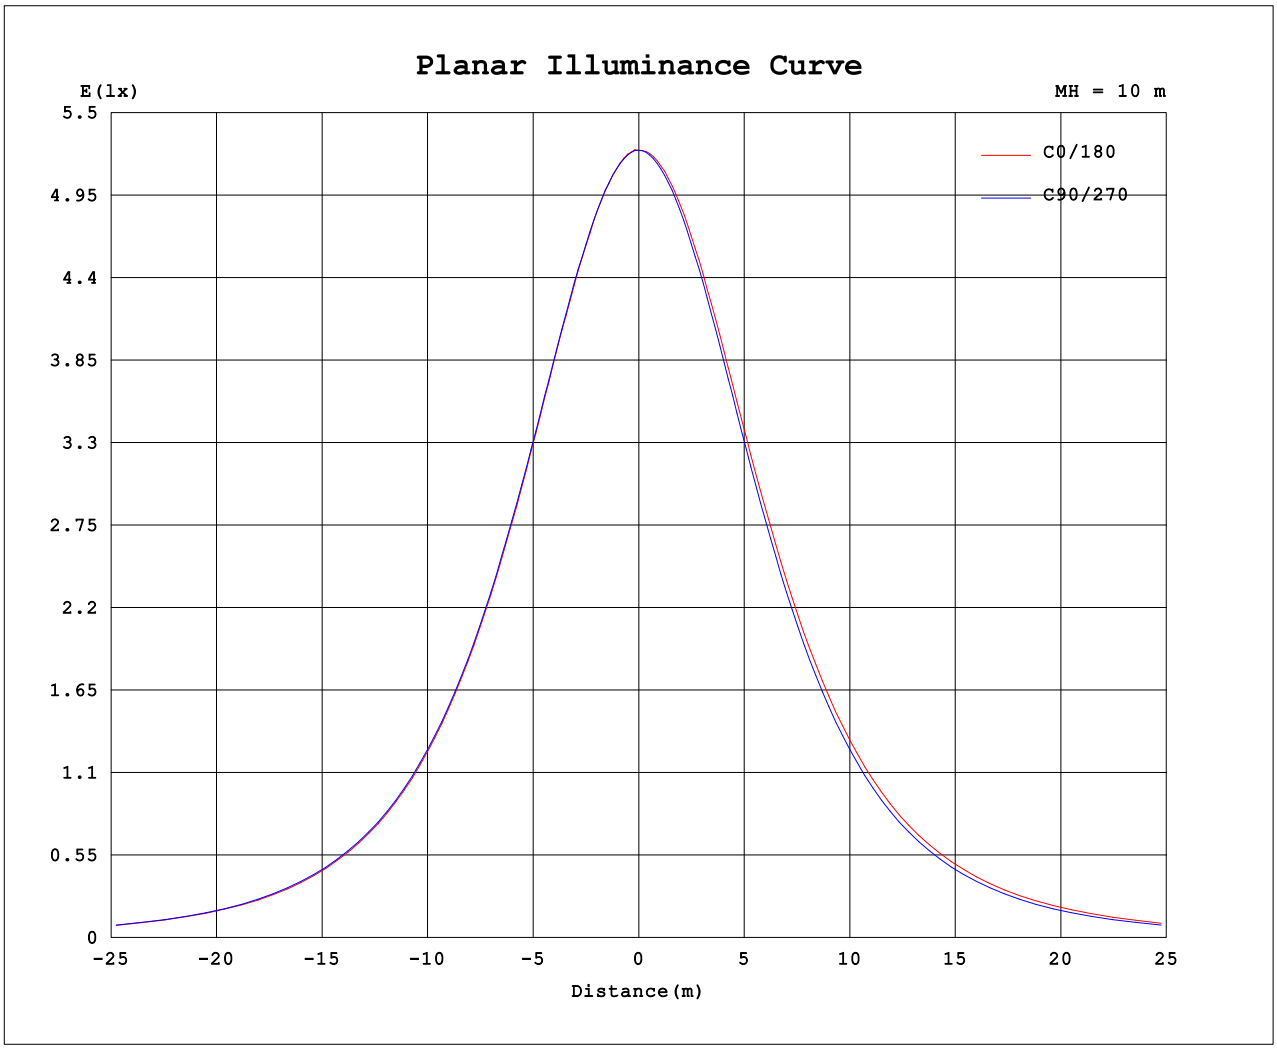

C Range: 0 - 180DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:03 August 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:7.382m [K=1.0000]
Remarks:

D:\测试数据\3-样品测试\LT\2024年\LT24211\FM11-375A-WH 26W 30K.GOS

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.11V I:0.2410A P:26.419W PF:0.9128 Freq:59.98Hz Lamp Flux:1578.81x1 lm		
NAME: 57596WTWT 26W 30K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1 UNIT: cd

γ \ C(DEG) (DEG)	0	90	180	270															
0	525	525	525	525															
5	522	522	524	522															
10	514	515	519	515															
15	502	504	511	504															
20	487	489	498	489															
25	467	470	480	470															
30	443	447	459	447															
35	416	420	434	420															
40	385	389	406	389															
45	351	355	373	355															
50	313	318	337	318															
55	273	278	298	278															
60	230	235	257	235															
65	186	190	213	190															
70	142	146	169	146															
75	97.9	103	125	103															
80	58.6	62.9	82.5	62.9															
85	23.8	28.0	44.3	28.0															
90	3.95	4.00	11.8	4.00															
95	4.18	4.22	4.07	4.22															
100	4.43	4.48	4.32	4.48															
105	4.71	4.75	4.58	4.75															
110	4.97	5.02	4.85	5.02															
115	5.22	5.27	5.11	5.27															
120	5.46	5.51	5.34	5.51															
125	5.68	5.74	5.57	5.74															
130	5.90	5.96	5.80	5.96															
135	6.09	6.15	6.00	6.15															
140	6.30	6.33	6.19	6.33															
145	6.48	6.52	6.39	6.52															
150	6.69	6.71	6.59	6.71															
155	6.91	6.92	6.82	6.92															
160	7.12	7.14	7.03	7.14															
165	7.32	7.35	7.25	7.35															
170	7.45	7.50	7.41	7.50															
175	7.55	7.59	7.54	7.59															
180	7.59	7.62	7.60	7.62															

C Range: 0 - 180DEG
C Interval: 90.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:03 August 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:7.382m [K=1.0000]
Remarks:

D:\测试数据\3-样品测试\LT\2024年\LT24211\FM11-375A-WH 26W 30K.GOS