

Report No.:

Test Time: 2026-10-08 17:03

Luminaire Property

Luminaire Manufacturer:

Luminaire Category:

Lamp Catalog:

Number of Lamps:

Luminous Length (mm): -126

Luminous Height (mm):

Current: 0.069 A

Power Factor: 0.906

Luminaire Description: 67797WT

Lamp Description:

Lumens per Lamp:

Luminous Width (mm): -126

Voltage: 220.5 V

Power: 13.82 W

Photometric Results

CIE Class: Direct

Measurement Flux: 1104.2 lm

Downward Ratio: 99%

Horizontal Diffuse Angle(50%): H149.1

Vertical Diffuse Angle(50%): V146.6

Luminaire Efficacy Rating (LER): 79.95

Max. Intensity: 276.71 cd

S/MH(C0/C180): 1.38

Total Rated Lamp Lumens: 1104.2 lm

Efficiency: 100%


Upward Ratio: 1%

C0r0 Intensity: 276.43 cd


Pos of Max. Intensity: H90 V0

S/MH(C90/C270): 1.37

Picture Of Luminaire



Luminous Intensity Distribution Curve

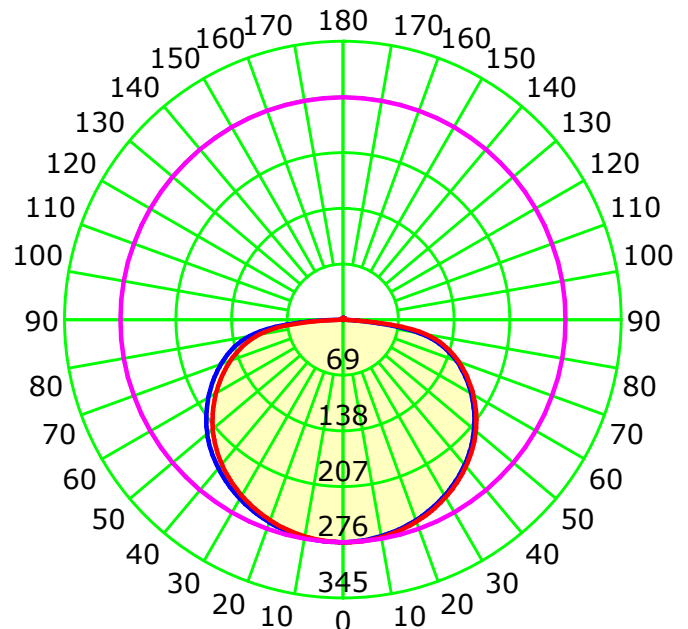

Unit: cd

Average Diffuse Angle(50%): 147.8°

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator: 张宇哲

Gamma Plane (°):0.0-180.0:1.0



Test Device: GPM-1600L

Distance: 6.490 m [K=1.0000]

Humidity:

Inspector:

Luminous Intensity Distribution Curve

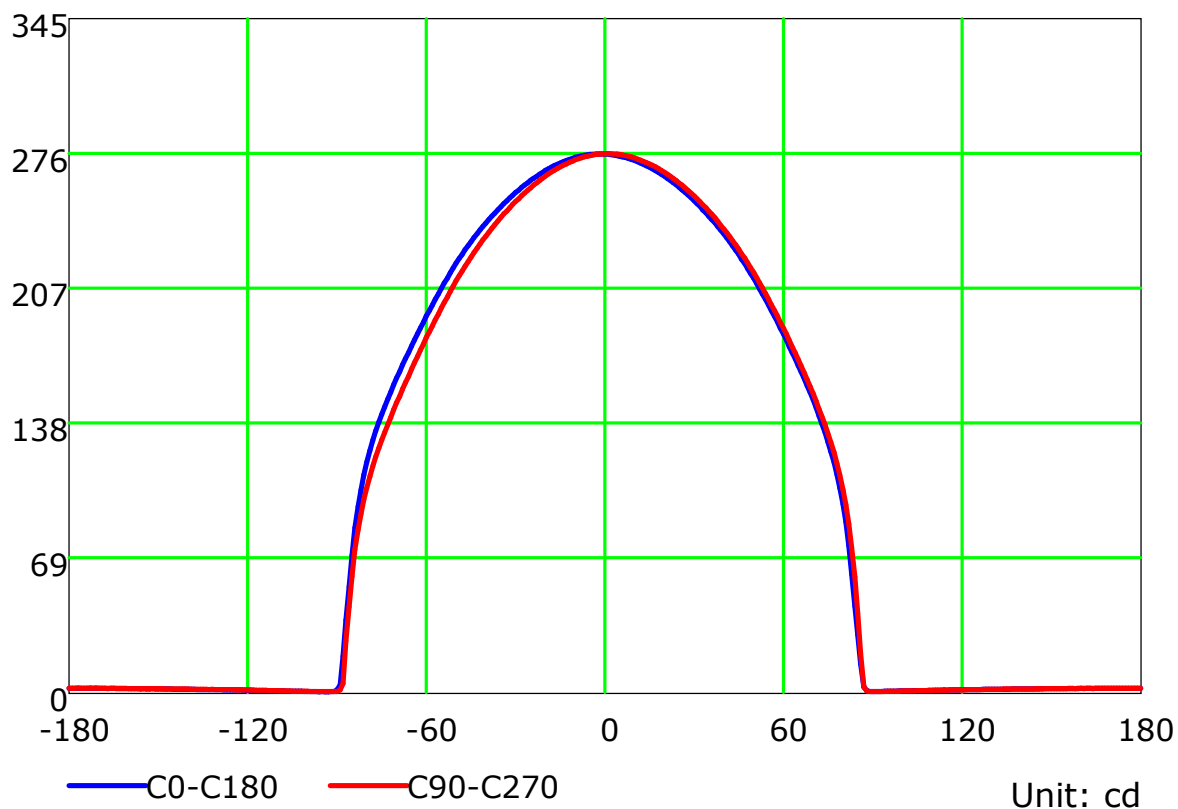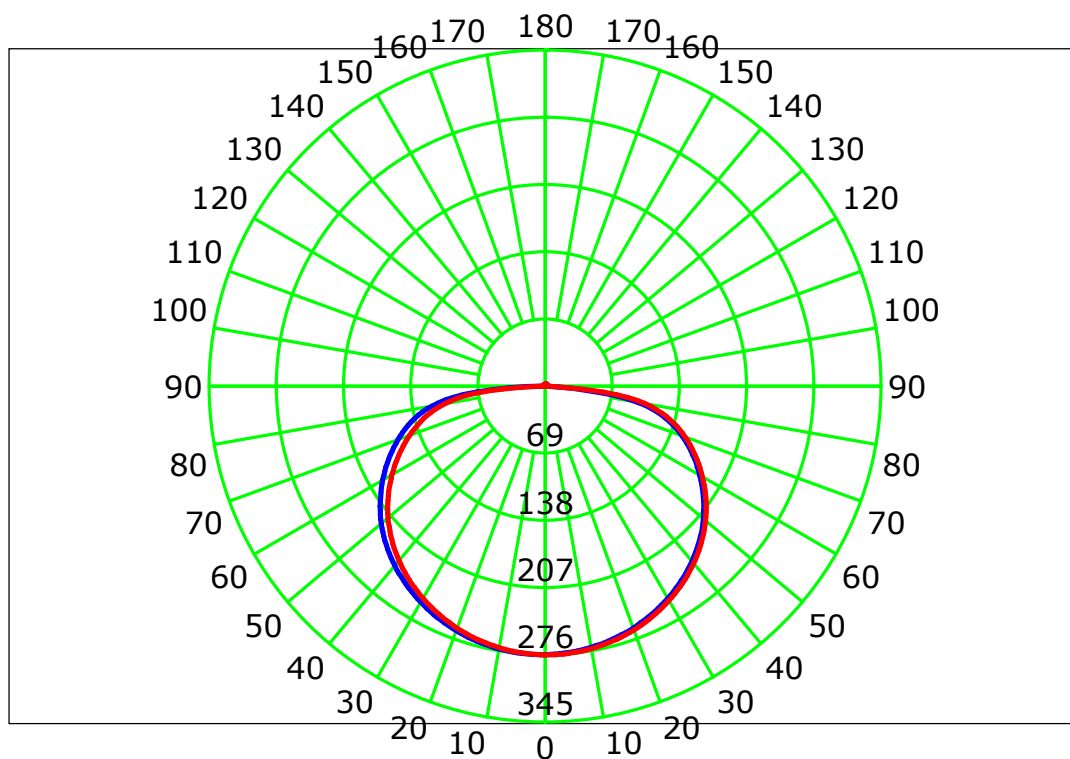

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator: 张宇哲

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 6.490 m [K=1.0000]
Humidity:
Inspector:


Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	0.99
1	1.06	1.00	0.95	0.90	1.03	0.98	0.93	0.88	0.93	0.89	0.85	0.89	0.86	0.83	0.85	0.82	0.80	0.78
2	0.95	0.85	0.77	0.70	0.92	0.83	0.76	0.69	0.79	0.73	0.67	0.76	0.70	0.66	0.72	0.68	0.64	0.62
3	0.85	0.73	0.64	0.57	0.83	0.72	0.63	0.56	0.68	0.61	0.55	0.65	0.59	0.54	0.63	0.57	0.53	0.50
4	0.78	0.64	0.54	0.47	0.75	0.63	0.53	0.46	0.60	0.52	0.46	0.57	0.50	0.45	0.55	0.49	0.44	0.42
5	0.71	0.57	0.47	0.39	0.69	0.56	0.46	0.39	0.53	0.45	0.39	0.51	0.44	0.38	0.49	0.43	0.38	0.35
6	0.65	0.51	0.41	0.34	0.63	0.50	0.40	0.34	0.48	0.39	0.33	0.46	0.39	0.33	0.44	0.38	0.33	0.30
7	0.60	0.46	0.36	0.30	0.58	0.45	0.36	0.29	0.43	0.35	0.29	0.42	0.34	0.29	0.40	0.34	0.29	0.26
8	0.56	0.42	0.32	0.26	0.54	0.41	0.32	0.26	0.39	0.31	0.26	0.38	0.31	0.26	0.37	0.30	0.25	0.23
9	0.52	0.38	0.29	0.23	0.51	0.37	0.29	0.23	0.36	0.28	0.23	0.35	0.28	0.23	0.34	0.27	0.23	0.21
10	0.49	0.35	0.27	0.21	0.48	0.34	0.26	0.21	0.33	0.26	0.21	0.32	0.25	0.21	0.31	0.25	0.20	0.19

Spacing Criteria (0-180): 1.38

Spacing Criteria (90-270): 1.37

Spacing Criteria (Diagonal): 1.53

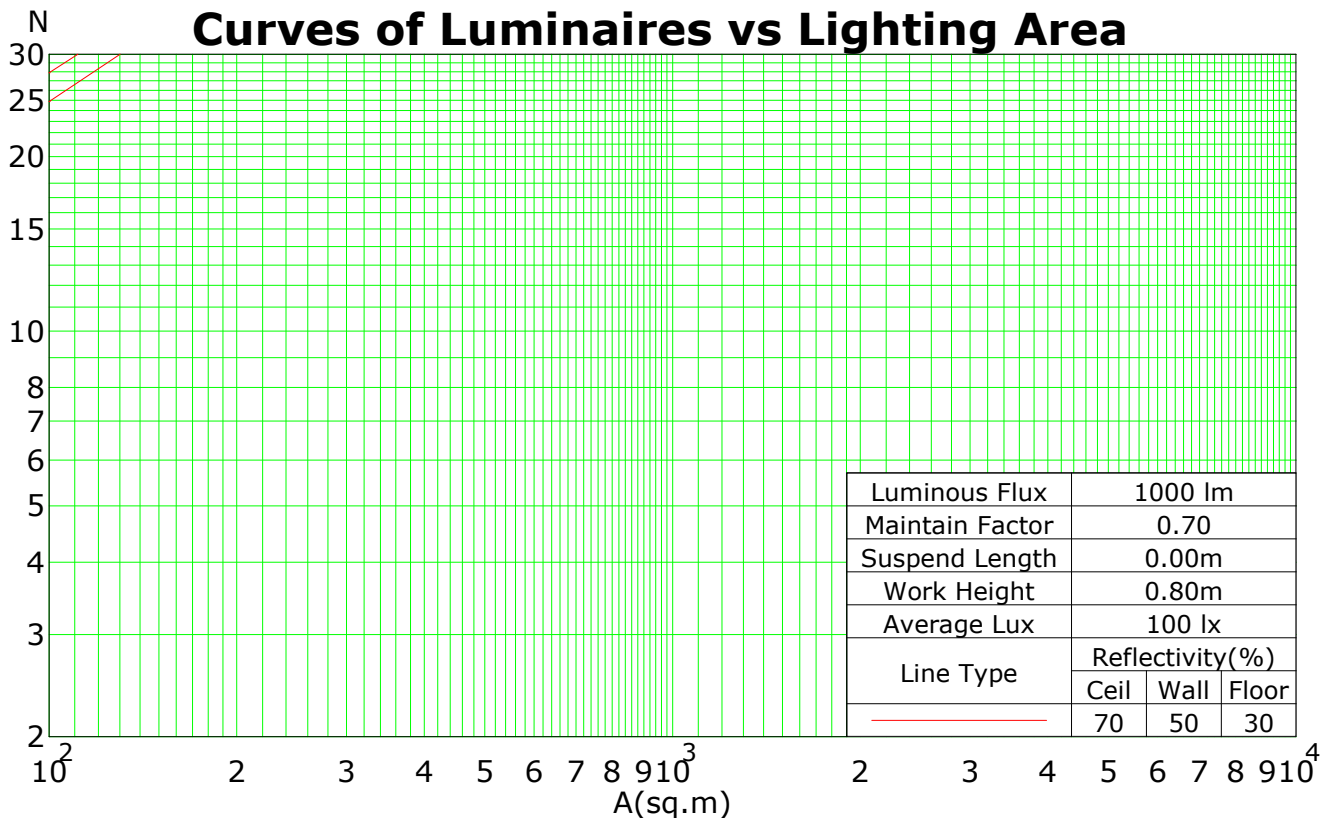

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator: 张宇哲

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1600L

Distance: 6.490 m [K=1.0000]

Humidity:

Inspector:

IsoLux Plot

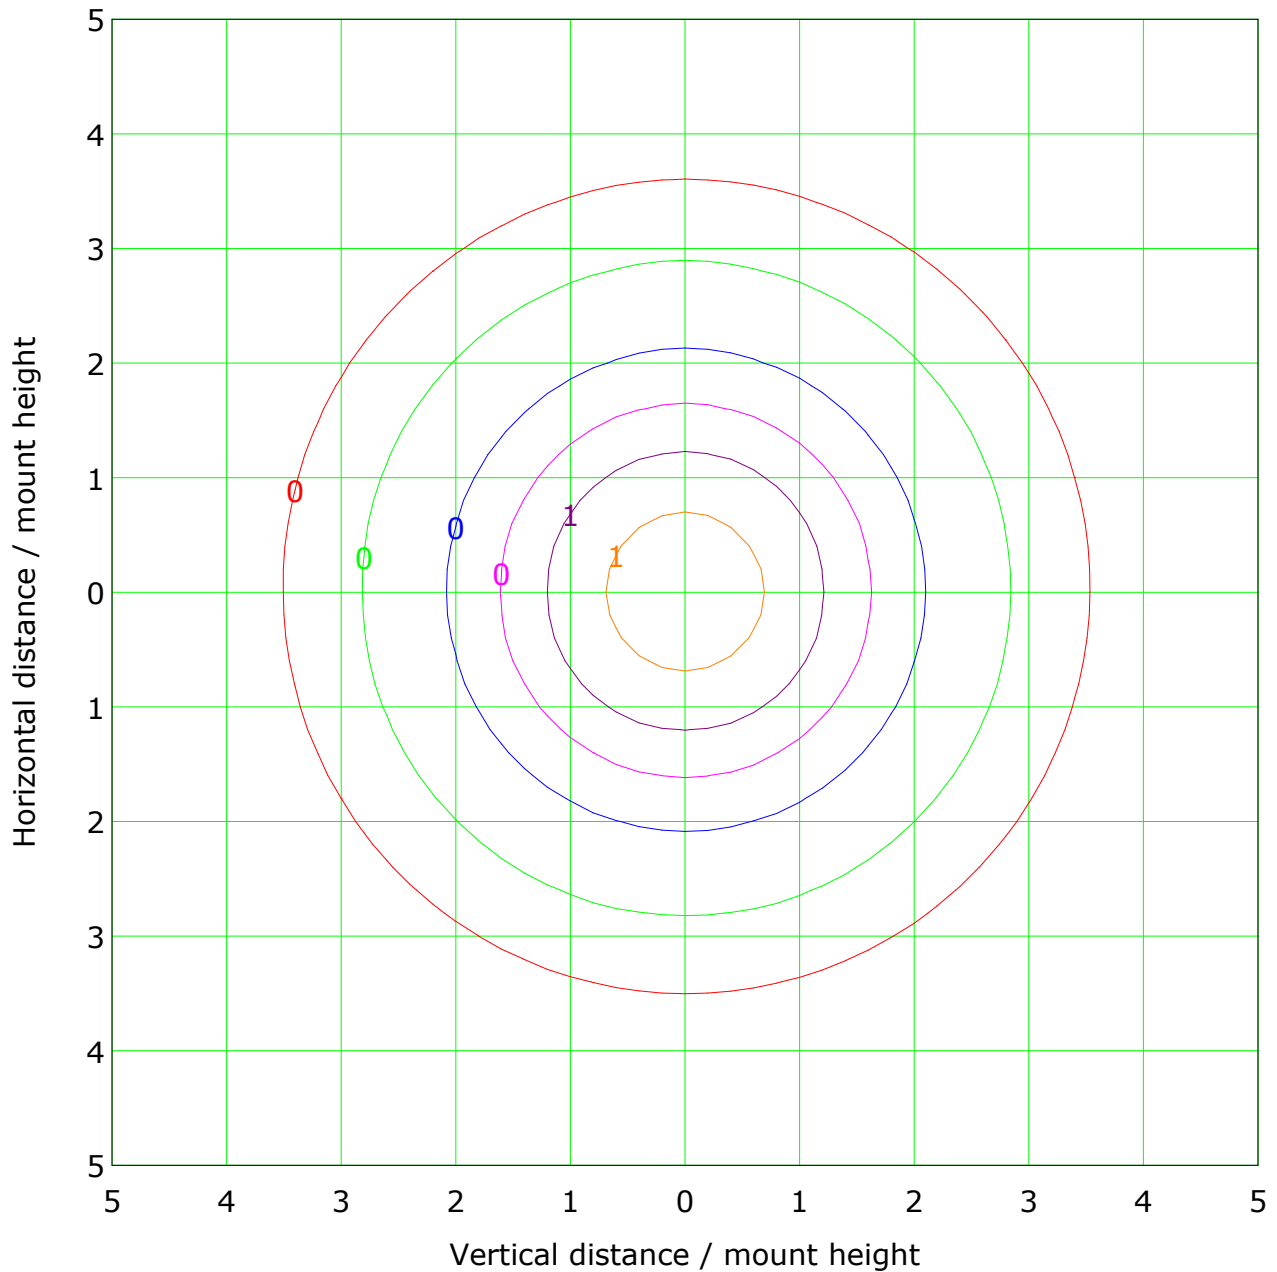

Mounting Height: 10.0m Max Lux(100%): 2.8 lx

(1%): 0.0 lx	(2%): 0.1 lx
(5%): 0.1 lx	(10%): 0.3 lx
(20%): 0.6 lx	(50%): 1.4 lx
(100%): 2.8 lx	



C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator: 张宇哲

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 6.490 m [K=1.0000]
Humidity:
Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

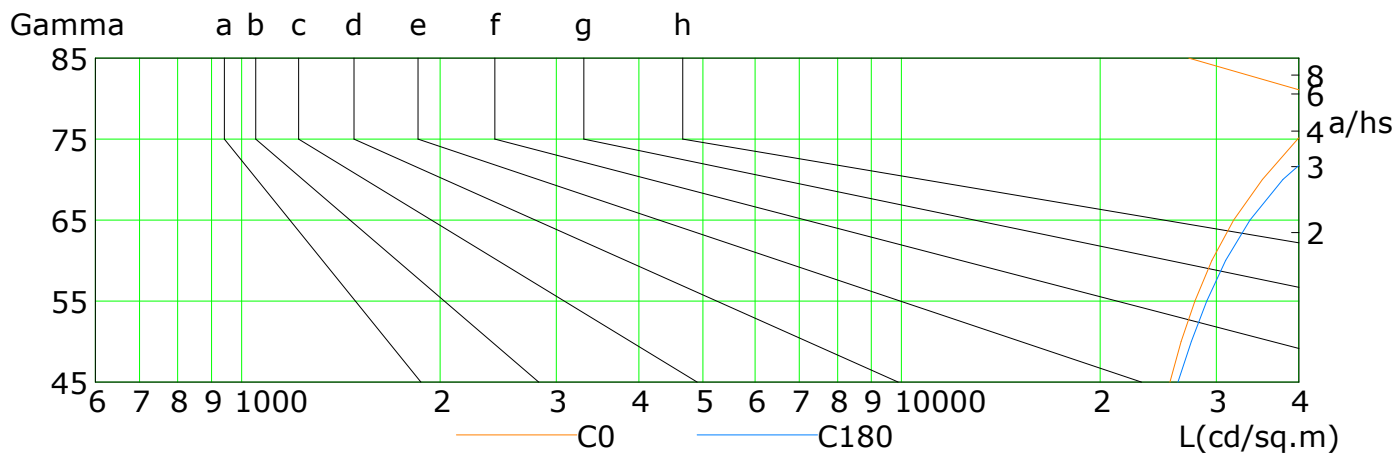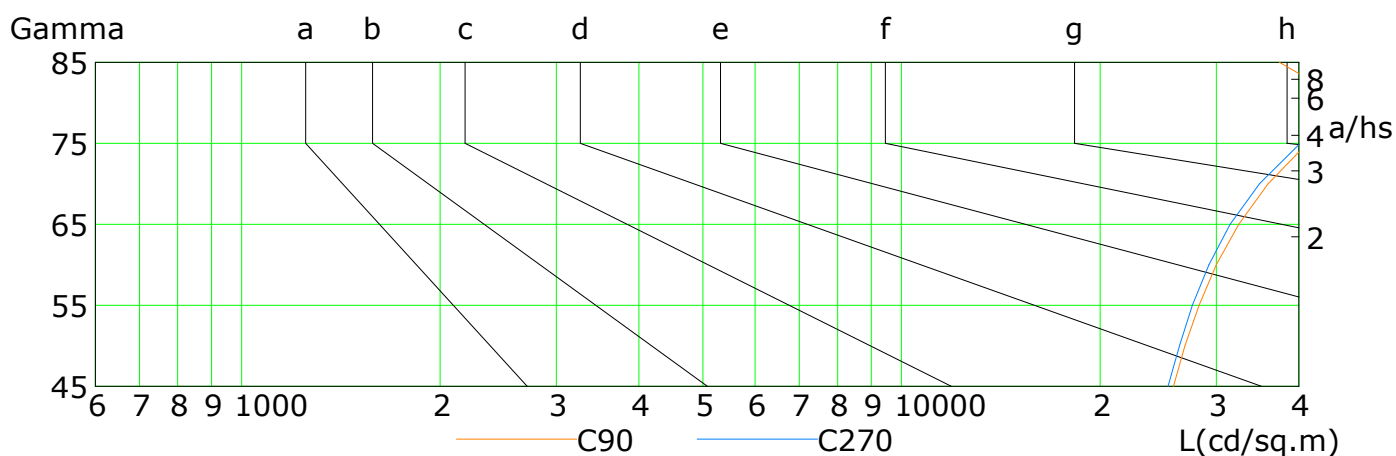


L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	25519	26542	27829	29528	31852	35248	39827	44642	27247
C90	25820	26902	28255	30006	32433	35958	41181	48106	37378
C180	26252	27505	29005	31007	33750	37867	44286	54586	64725
C270	25349	26377	27600	29234	31496	34887	40196	48531	55018


C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator: 张宇哲

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 6.490 m [K=1.0000]
Humidity:
Inspector:

Illuminance at a Distance

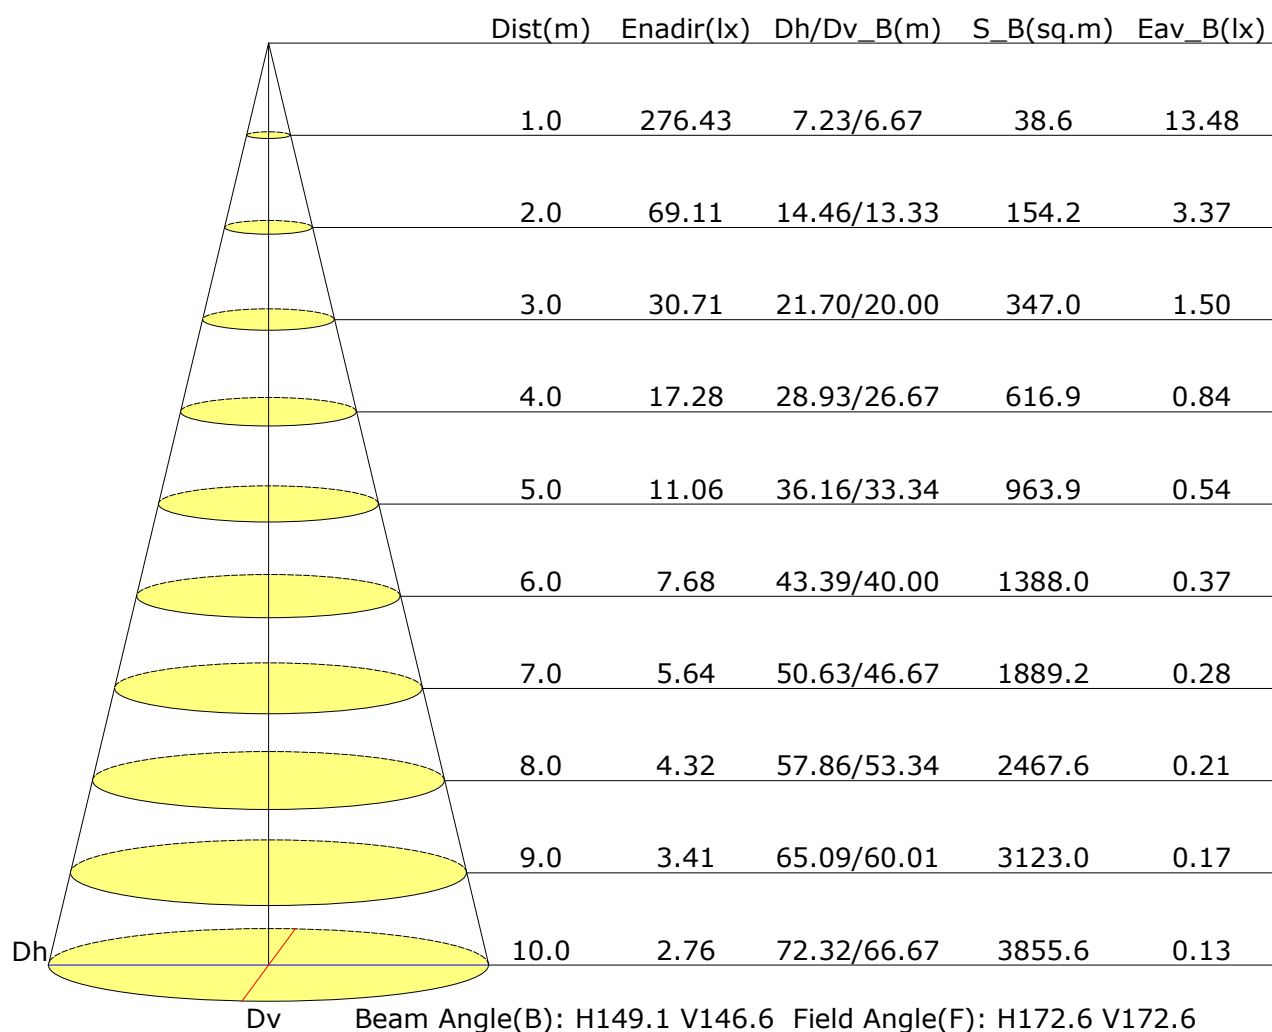


Vertical IsoLux Plot

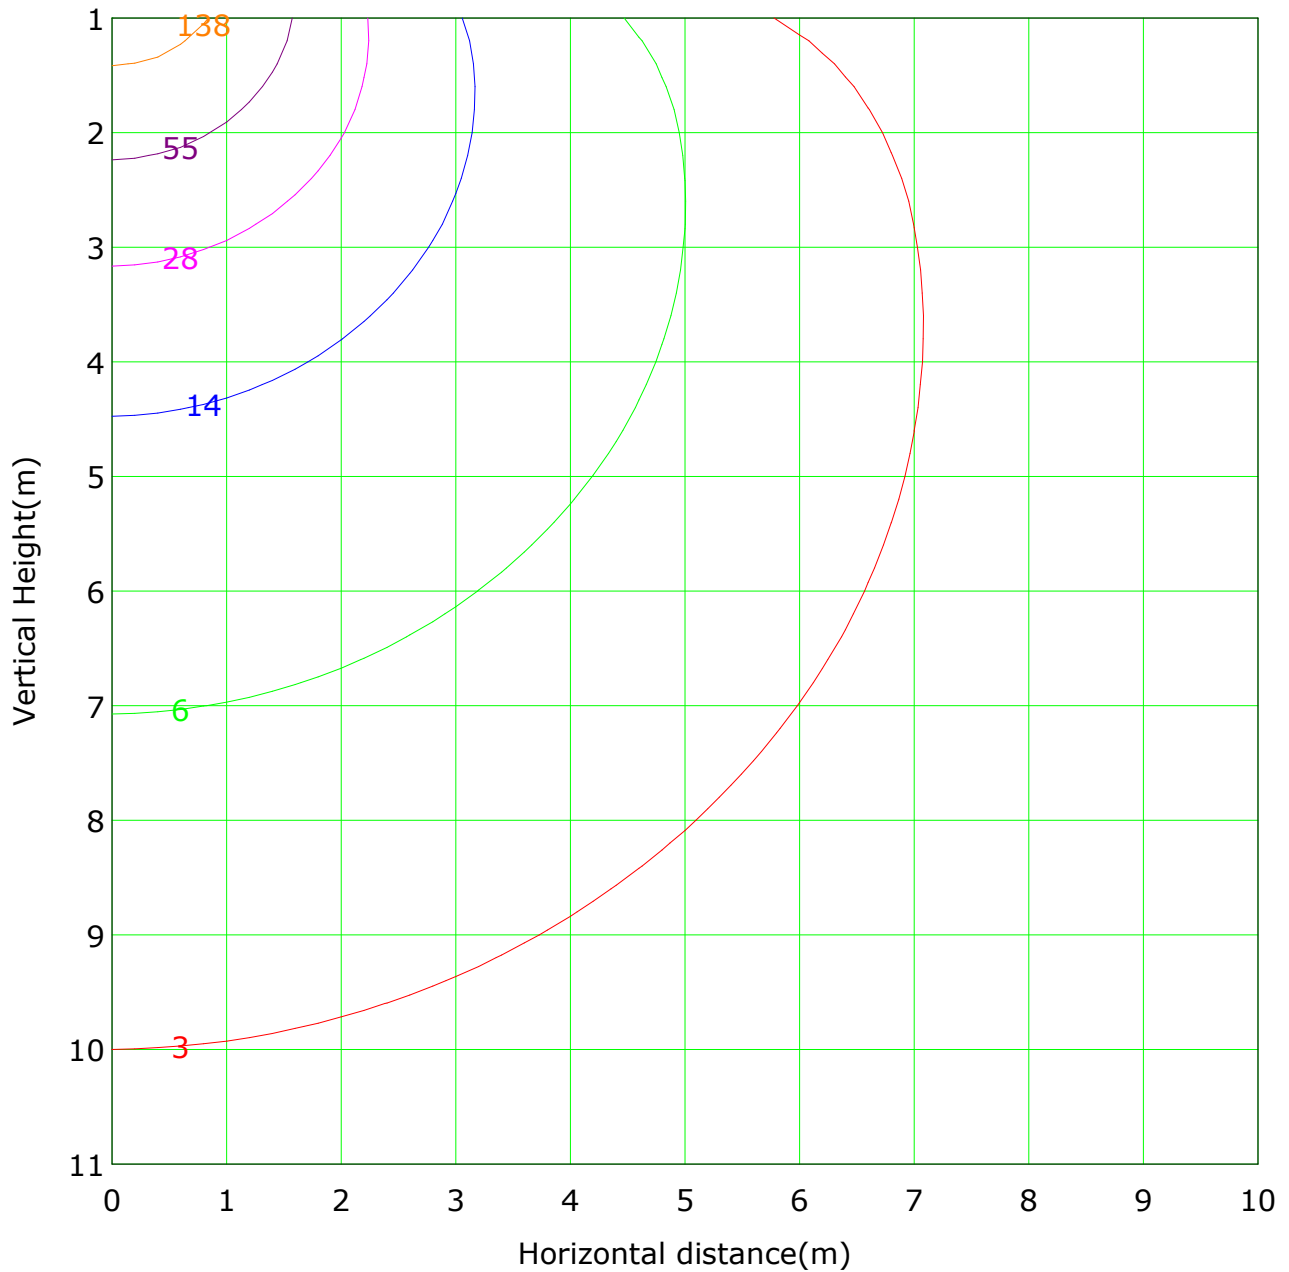

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 276.4 lx
— (1%): 2.8 lx — (2%): 5.5 lx
— (5%): 13.8 lx — (10%): 27.6 lx
— (20%): 55.3 lx — (50%): 138.2 lx
— (100%): 276.4 lx

The Average Illuminance Effective Figure

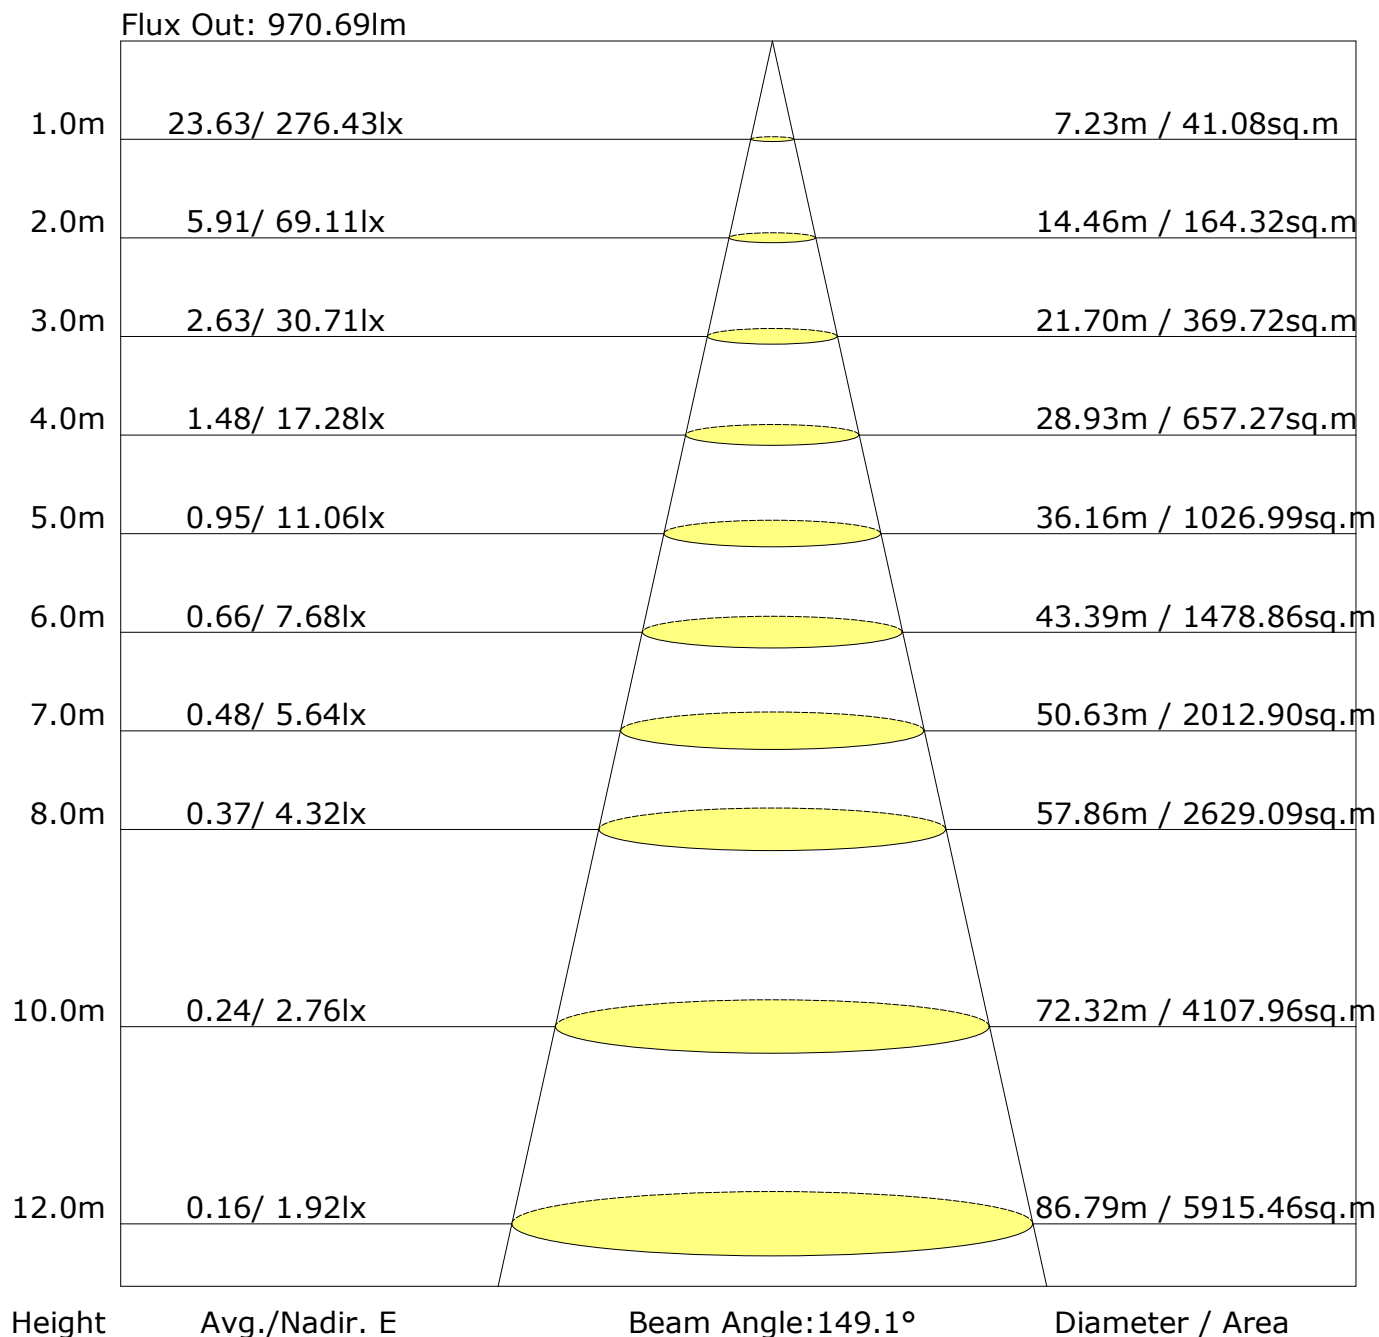

UGR Table

Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	24.3	25.8	24.6	26.1	26.4	24.3	25.8	24.6	26.1	26.4
3H	26.7	28.1	27.1	28.4	28.7	26.8	28.2	27.1	28.5	28.8
4H	28.0	29.3	28.3	29.6	30.0	28.0	29.4	28.4	29.7	30.0
6H	29.1	30.4	29.5	30.7	31.1	29.3	30.5	29.6	30.8	31.2
8H	29.5	30.8	29.9	31.1	31.5	29.8	31.0	30.2	31.3	31.7
12H	29.7	30.9	30.1	31.2	31.6	30.2	31.3	30.6	31.7	32.1
X=4H Y=2H	25.2	26.6	25.6	26.9	27.2	25.2	26.6	25.6	26.9	27.2
3H	27.9	29.0	28.3	29.4	29.8	27.9	29.1	28.3	29.4	29.8
4H	29.3	30.3	29.7	30.7	31.1	29.3	30.4	29.7	30.8	31.2
6H	30.6	31.5	31.0	31.9	32.4	30.7	31.7	31.2	32.1	32.5
8H	31.1	32.0	31.5	32.4	32.8	31.3	32.2	31.8	32.6	33.1
12H	31.3	32.1	31.8	32.5	33.0	31.8	32.6	32.2	33.0	33.5
X=8H Y=4H	29.9	30.8	30.3	31.2	31.6	29.9	30.8	30.4	31.2	31.7
6H	31.4	32.1	31.9	32.6	33.1	31.5	32.3	32.0	32.7	33.2
8H	32.0	32.7	32.5	33.1	33.6	32.3	32.9	32.8	33.4	33.9
12H	32.3	32.9	32.8	33.4	33.9	32.8	33.4	33.3	33.9	34.4
X=12H Y=4H	30.0	30.8	30.5	31.2	31.7	30.0	30.8	30.5	31.3	31.7
6H	31.6	32.2	32.1	32.7	33.2	31.7	32.4	32.2	32.8	33.3
8H	32.3	32.8	32.8	33.3	33.8	32.5	33.1	33.0	33.6	34.1
Variations with the observer position at spacings:										
S=1.0H	+0.2/-0.2					+0.3/-0.3				
S=1.5H	+0.4/-0.4					+0.4/-0.5				
S=2.0H	+0.5/-0.7					+0.6/-0.7				

Calculate in accordance with CIE Pub.117. The table is revised with 1104Im ($8\log(F/F_0) = 0.3$).

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

	ZONE	LUMENS	% LAMP LUMENS
	FORWARD LIGHT	539	48.8
	FL (0°-30°)	111	10.1
	FM (30°-60°)	253	22.9
	FH (60°-80°)	151	13.7
	FVH (80°-90°)	23	2.1
	BACK LIGHT	557	50.5
	BL (0°-30°)	112	10.1
	BM (30°-60°)	257	23.3
	BH (60°-80°)	158	14.3
	BVH (80°-90°)	31	2.8
	UP LIGHT	9	0.8
	UL (90°-100°)	1	0.1
	UH (100°-180°)	8	0.7
	TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B1 U1 G1
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B1 U1 G1

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator: 张宇哲

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 6.490 m [K=1.0000]
Humidity:
Inspector:

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	276.5	0.3	0.3	0.02	0.02
1.0-2.0	276.4	0.8	1.1	0.07	0.10
2.0-3.0	276.3	1.3	2.4	0.12	0.22
3.0-4.0	276.2	1.8	4.2	0.17	0.38
4.0-5.0	276.0	2.4	6.6	0.22	0.60
5.0-6.0	275.7	2.9	9.5	0.26	0.86
6.0-7.0	275.4	3.4	12.9	0.31	1.17
7.0-8.0	275.0	3.9	16.9	0.36	1.53
8.0-9.0	274.6	4.5	21.3	0.40	1.93
9.0-10.0	274.2	5.0	26.3	0.45	2.38
10.0-11.0	273.6	5.5	31.7	0.50	2.87
11.0-12.0	273.0	6.0	37.7	0.54	3.42
12.0-13.0	272.4	6.5	44.2	0.59	4.00
13.0-14.0	271.8	7.0	51.1	0.63	4.63
14.0-15.0	271.1	7.4	58.6	0.67	5.30
15.0-16.0	270.3	7.9	66.5	0.72	6.02
16.0-17.0	269.5	8.4	74.9	0.76	6.78
17.0-18.0	268.7	8.9	83.8	0.80	7.58
18.0-19.0	267.8	9.3	93.1	0.84	8.43
19.0-20.0	266.8	9.8	102.8	0.88	9.31
20.0-21.0	265.8	10.2	113.0	0.92	10.24
21.0-22.0	264.8	10.6	123.7	0.96	11.20
22.0-23.0	263.7	11.1	134.8	1.00	12.20
23.0-24.0	262.6	11.5	146.2	1.04	13.24
24.0-25.0	261.4	11.9	158.1	1.08	14.32
25.0-26.0	260.1	12.3	170.4	1.11	15.43
26.0-27.0	258.9	12.7	183.1	1.15	16.58
27.0-28.0	257.5	13.0	196.1	1.18	17.76
28.0-29.0	256.2	13.4	209.5	1.21	18.97
29.0-30.0	254.7	13.8	223.3	1.25	20.22
30.0-31.0	253.3	14.1	237.4	1.28	21.50
31.0-32.0	251.8	14.4	251.8	1.31	22.80
32.0-33.0	250.3	14.7	266.5	1.34	24.14
33.0-34.0	248.7	15.1	281.6	1.36	25.50
34.0-35.0	247.1	15.3	296.9	1.39	26.89
35.0-36.0	245.4	15.6	312.6	1.42	28.31

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator: 张宇哲

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 6.490 m [K=1.0000]
Humidity:
Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	243.7	15.9	328.5	1.44	29.75
37.0-38.0	241.8	16.1	344.6	1.46	31.21
38.0-39.0	240.0	16.4	361.0	1.48	32.69
39.0-40.0	238.1	16.6	377.6	1.50	34.20
40.0-41.0	236.2	16.8	394.4	1.52	35.72
41.0-42.0	234.3	17.0	411.4	1.54	37.26
42.0-43.0	232.2	17.2	428.7	1.56	38.82
43.0-44.0	230.1	17.4	446.0	1.57	40.39
44.0-45.0	228.0	17.5	463.5	1.59	41.98
45.0-46.0	225.8	17.7	481.2	1.60	43.58
46.0-47.0	223.5	17.8	499.0	1.61	45.19
47.0-48.0	221.1	17.9	516.9	1.62	46.81
48.0-49.0	218.7	18.0	534.8	1.63	48.43
49.0-50.0	216.3	18.0	552.9	1.63	50.07
50.0-51.0	213.7	18.1	570.9	1.64	51.70
51.0-52.0	211.1	18.1	589.1	1.64	53.35
52.0-53.0	208.4	18.1	607.2	1.64	54.99
53.0-54.0	205.6	18.1	625.3	1.64	56.63
54.0-55.0	202.9	18.1	643.4	1.64	58.27
55.0-56.0	200.0	18.1	661.5	1.64	59.91
56.0-57.0	197.1	18.0	679.5	1.63	61.54
57.0-58.0	194.2	18.0	697.5	1.63	63.16
58.0-59.0	191.2	17.9	715.3	1.62	64.78
59.0-60.0	188.1	17.8	733.1	1.61	66.39
60.0-61.0	185.1	17.7	750.8	1.60	67.99
61.0-62.0	181.9	17.5	768.3	1.59	69.58
62.0-63.0	178.8	17.4	785.7	1.58	71.16
63.0-64.0	175.6	17.2	803.0	1.56	72.72
64.0-65.0	172.3	17.1	820.0	1.54	74.26
65.0-66.0	169.0	16.9	836.9	1.53	75.79
66.0-67.0	165.6	16.7	853.5	1.51	77.30
67.0-68.0	162.2	16.4	870.0	1.49	78.78
68.0-69.0	158.8	16.2	886.2	1.47	80.25
69.0-70.0	155.3	15.9	902.1	1.44	81.70
70.0-71.0	151.6	15.7	917.8	1.42	83.12
71.0-72.0	147.7	15.4	933.1	1.39	84.51

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator: 张宇哲

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 6.490 m [K=1.0000]
Humidity:
Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	143.9	15.0	948.2	1.36	85.87
73.0-74.0	139.9	14.7	962.9	1.33	87.20
74.0-75.0	135.7	14.3	977.2	1.30	88.50
75.0-76.0	131.3	13.9	991.2	1.26	89.76
76.0-77.0	126.7	13.5	1004.7	1.22	90.99
77.0-78.0	121.5	13.0	1017.7	1.18	92.16
78.0-79.0	115.9	12.5	1030.2	1.13	93.29
79.0-80.0	109.5	11.8	1042.0	1.07	94.36
80.0-81.0	102.4	11.1	1053.0	1.00	95.36
81.0-82.0	94.1	10.2	1063.2	0.92	96.29
82.0-83.0	84.0	9.1	1072.4	0.83	97.11
83.0-84.0	72.0	7.8	1080.2	0.71	97.83
84.0-85.0	57.8	6.3	1086.5	0.57	98.40
85.0-86.0	41.7	4.6	1091.1	0.41	98.81
86.0-87.0	25.4	2.8	1093.8	0.25	99.06
87.0-88.0	11.9	1.3	1095.1	0.12	99.18
88.0-89.0	4.0	0.4	1095.6	0.04	99.22
89.0-90.0	1.2	0.1	1095.7	0.01	99.23
90.0-91.0	0.7	0.1	1095.8	0.01	99.24
91.0-92.0	0.6	0.1	1095.8	0.01	99.24
92.0-93.0	0.6	0.1	1095.9	0.01	99.25
93.0-94.0	0.6	0.1	1096.0	0.01	99.25
94.0-95.0	0.6	0.1	1096.0	0.01	99.26
95.0-96.0	0.6	0.1	1096.1	0.01	99.26
96.0-97.0	0.6	0.1	1096.2	0.01	99.27
97.0-98.0	0.7	0.1	1096.2	0.01	99.28
98.0-99.0	0.7	0.1	1096.3	0.01	99.28
99.0-100.0	0.7	0.1	1096.4	0.01	99.29
100.0-101.0	0.8	0.1	1096.5	0.01	99.30
101.0-102.0	0.8	0.1	1096.6	0.01	99.31
102.0-103.0	0.8	0.1	1096.7	0.01	99.31
103.0-104.0	0.8	0.1	1096.7	0.01	99.32
104.0-105.0	0.9	0.1	1096.8	0.01	99.33
105.0-106.0	0.9	0.1	1096.9	0.01	99.34
106.0-107.0	0.9	0.1	1097.0	0.01	99.35
107.0-108.0	1.0	0.1	1097.1	0.01	99.36

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator: 张宇哲

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 6.490 m [K=1.0000]
Humidity:
Inspector:

Zonal Lumen (Continue 3)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	1.0	0.1	1097.2	0.01	99.37
109.0-110.0	1.0	0.1	1097.3	0.01	99.38
110.0-111.0	1.1	0.1	1097.5	0.01	99.39
111.0-112.0	1.1	0.1	1097.6	0.01	99.40
112.0-113.0	1.2	0.1	1097.7	0.01	99.41
113.0-114.0	1.2	0.1	1097.8	0.01	99.42
114.0-115.0	1.2	0.1	1097.9	0.01	99.43
115.0-116.0	1.2	0.1	1098.0	0.01	99.44
116.0-117.0	1.3	0.1	1098.2	0.01	99.45
117.0-118.0	1.3	0.1	1098.3	0.01	99.46
118.0-119.0	1.3	0.1	1098.4	0.01	99.48
119.0-120.0	1.4	0.1	1098.6	0.01	99.49
120.0-121.0	1.4	0.1	1098.7	0.01	99.50
121.0-122.0	1.4	0.1	1098.8	0.01	99.51
122.0-123.0	1.5	0.1	1099.0	0.01	99.52
123.0-124.0	1.5	0.1	1099.1	0.01	99.54
124.0-125.0	1.5	0.1	1099.2	0.01	99.55
125.0-126.0	1.5	0.1	1099.4	0.01	99.56
126.0-127.0	1.6	0.1	1099.5	0.01	99.57
127.0-128.0	1.6	0.1	1099.6	0.01	99.59
128.0-129.0	1.6	0.1	1099.8	0.01	99.60
129.0-130.0	1.6	0.1	1099.9	0.01	99.61
130.0-131.0	1.6	0.1	1100.1	0.01	99.62
131.0-132.0	1.7	0.1	1100.2	0.01	99.64
132.0-133.0	1.7	0.1	1100.3	0.01	99.65
133.0-134.0	1.7	0.1	1100.5	0.01	99.66
134.0-135.0	1.7	0.1	1100.6	0.01	99.67
135.0-136.0	1.7	0.1	1100.7	0.01	99.68
136.0-137.0	1.8	0.1	1100.9	0.01	99.70
137.0-138.0	1.8	0.1	1101.0	0.01	99.71
138.0-139.0	1.8	0.1	1101.1	0.01	99.72
139.0-140.0	1.8	0.1	1101.3	0.01	99.73
140.0-141.0	1.8	0.1	1101.4	0.01	99.74
141.0-142.0	1.8	0.1	1101.5	0.01	99.75
142.0-143.0	1.8	0.1	1101.6	0.01	99.77
143.0-144.0	1.9	0.1	1101.8	0.01	99.78

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator: 张宇哲

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 6.490 m [K=1.0000]
Humidity:
Inspector:

Zonal Lumen (Continue 4)

Gamma [°]	Imean [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	1.9	0.1	1101.9	0.01	99.79
145.0-146.0	1.9	0.1	1102.0	0.01	99.80
146.0-147.0	1.9	0.1	1102.1	0.01	99.81
147.0-148.0	2.0	0.1	1102.2	0.01	99.82
148.0-149.0	2.0	0.1	1102.3	0.01	99.83
149.0-150.0	2.0	0.1	1102.4	0.01	99.84
150.0-151.0	2.0	0.1	1102.6	0.01	99.85
151.0-152.0	2.0	0.1	1102.7	0.01	99.86
152.0-153.0	2.0	0.1	1102.8	0.01	99.87
153.0-154.0	2.0	0.1	1102.9	0.01	99.88
154.0-155.0	2.0	0.1	1103.0	0.01	99.89
155.0-156.0	2.1	0.1	1103.1	0.01	99.89
156.0-157.0	2.1	0.1	1103.1	0.01	99.90
157.0-158.0	2.1	0.1	1103.2	0.01	99.91
158.0-159.0	2.1	0.1	1103.3	0.01	99.92
159.0-160.0	2.1	0.1	1103.4	0.01	99.93
160.0-161.0	2.1	0.1	1103.5	0.01	99.93
161.0-162.0	2.1	0.1	1103.6	0.01	99.94
162.0-163.0	2.1	0.1	1103.6	0.01	99.95
163.0-164.0	2.1	0.1	1103.7	0.01	99.95
164.0-165.0	2.2	0.1	1103.8	0.01	99.96
165.0-166.0	2.2	0.1	1103.8	0.01	99.96
166.0-167.0	2.2	0.1	1103.9	0.01	99.97
167.0-168.0	2.2	0.1	1103.9	0.00	99.97
168.0-169.0	2.2	0.0	1104.0	0.00	99.98
169.0-170.0	2.2	0.0	1104.0	0.00	99.98
170.0-171.0	2.2	0.0	1104.1	0.00	99.98
171.0-172.0	2.2	0.0	1104.1	0.00	99.99
172.0-173.0	2.2	0.0	1104.1	0.00	99.99
173.0-174.0	2.2	0.0	1104.1	0.00	99.99
174.0-175.0	2.2	0.0	1104.2	0.00	100.00
175.0-176.0	2.2	0.0	1104.2	0.00	100.00
176.0-177.0	2.2	0.0	1104.2	0.00	100.00
177.0-178.0	2.3	0.0	1104.2	0.00	100.00
178.0-179.0	2.3	0.0	1104.2	0.00	100.00
179.0-180.0	2.2	0.0	1104.2	0.00	100.00

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator: 张宇哲

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 6.490 m [K=1.0000]
Humidity:
Inspector:

Zonal Lumen (Continue 5)

cone flux(90°): 463.55 lm

%lum = 42.0%

%lamp = 42.0%

cone flux(120°): 733.13 lm

%lum = 66.4%

%lamp = 66.4%

Candlepower Table

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G0.0	276.4	276.7	276.4	276.7	276.4					
G1.0	276.4	276.6	276.4	276.5	276.4					
G2.0	276.1	276.6	276.4	276.4	276.1					
G3.0	275.9	276.5	276.5	276.2	275.9					
G4.0	275.7	276.4	276.4	276.0	275.7					
G5.0	275.4	276.2	276.3	275.7	275.4					
G6.0	275.0	275.9	276.0	275.3	275.0					
G7.0	274.6	275.6	275.8	275.0	274.6					
G8.0	274.2	275.3	275.4	274.5	274.2					
G9.0	273.6	275.0	275.1	274.0	273.6					
G10.0	273.1	274.4	274.8	273.5	273.1					
G11.0	272.5	273.9	274.2	272.7	272.5					
G12.0	271.8	273.4	273.7	272.2	271.8					
G13.0	271.2	272.7	273.1	271.4	271.2					
G14.0	270.4	272.0	272.5	270.7	270.4					
G15.0	269.7	271.4	271.9	269.9	269.7					
G16.0	268.9	270.8	271.2	269.0	268.9					
G17.0	268.0	269.8	270.5	268.1	268.0					
G18.0	267.1	269.0	269.7	267.3	267.1					
G19.0	266.2	268.1	268.8	266.2	266.2					
G20.0	265.1	267.1	268.0	265.2	265.1					
G21.0	264.0	266.1	267.0	264.0	264.0					
G22.0	262.9	265.1	266.0	262.9	262.9					
G23.0	261.8	264.0	265.0	261.7	261.8					
G24.0	260.6	262.9	263.9	260.4	260.6					
G25.0	259.3	261.6	262.9	259.1	259.3					
G26.0	258.1	260.5	261.7	257.9	258.1					
G27.0	256.7	259.0	260.5	256.5	256.7					
G28.0	255.4	257.8	259.4	255.1	255.4					
G29.0	254.1	256.4	257.9	253.5	254.1					
G30.0	252.5	254.9	256.7	252.1	252.5					
G31.0	251.0	253.4	255.3	250.6	251.0					
G32.0	249.6	252.0	253.9	248.9	249.6					
G33.0	247.8	250.4	252.4	247.2	247.8					
G34.0	246.3	248.8	251.0	245.6	246.3					
G35.0	244.4	247.1	249.4	243.8	244.4					
G36.0	242.8	245.5	247.8	242.1	242.8					

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator: 张宇哲

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 6.490 m [K=1.0000]
Humidity:
Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G37.0	241.1	243.7	246.1	240.1	241.1					
G38.0	239.1	241.8	244.6	238.3	239.1					
G39.0	237.3	239.9	242.9	236.4	237.3					
G40.0	235.3	237.9	241.0	234.2	235.3					
G41.0	233.4	236.0	239.4	232.4	233.4					
G42.0	231.4	234.0	237.5	230.3	231.4					
G43.0	229.3	231.9	235.5	228.1	229.3					
G44.0	227.1	229.7	233.6	225.9	227.1					
G45.0	225.0	227.6	231.5	223.5	225.0					
G46.0	222.4	225.2	229.5	221.3	222.4					
G47.0	220.3	223.0	227.4	218.8	220.3					
G48.0	217.7	220.6	224.9	216.3	217.7					
G49.0	215.2	218.1	222.8	214.0	215.2					
G50.0	212.7	215.6	220.4	211.4	212.7					
G51.0	210.0	213.0	217.9	208.6	210.0					
G52.0	207.3	210.3	215.5	206.0	207.3					
G53.0	204.7	207.7	212.7	202.9	204.7					
G54.0	201.8	204.9	210.2	200.2	201.8					
G55.0	199.0	202.1	207.4	197.4	199.0					
G56.0	196.0	199.1	204.6	194.3	196.0					
G57.0	193.1	196.1	201.8	191.3	193.1					
G58.0	190.3	193.3	198.9	188.2	190.3					
G59.0	187.0	190.1	196.2	185.2	187.0					
G60.0	184.1	187.1	193.3	182.3	184.1					
G61.0	181.1	184.1	190.1	178.9	181.1					
G62.0	177.6	180.8	187.2	175.8	177.6					
G63.0	174.6	177.6	184.2	172.6	174.6					
G64.0	171.2	174.3	181.0	169.3	171.2					
G65.0	167.9	170.9	177.9	166.0	167.9					
G66.0	164.6	167.7	174.6	162.5	164.6					
G67.0	161.1	164.1	171.4	159.1	161.1					
G68.0	157.5	160.6	168.3	155.9	157.5					
G69.0	154.2	157.1	164.7	152.1	154.2					
G70.0	150.3	153.4	161.5	148.8	150.3					
G71.0	146.3	149.6	158.0	145.2	146.3					
G72.0	142.0	145.5	154.1	141.2	142.0					
G73.0	138.0	141.7	150.7	137.7	138.0					

C Plane (°):0.0-360.0: 90.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator: 张宇哲

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 6.490 m [K=1.0000]
 Humidity:
 Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G74.0	133.5	137.5	146.7	133.4	133.5					
G75.0	128.5	132.9	142.9	129.7	128.5					
G76.0	123.6	128.4	138.9	125.6	123.6					
G77.0	118.2	123.3	134.4	121.0	118.2					
G78.0	111.9	117.5	129.5	116.2	111.9					
G79.0	105.1	111.6	124.2	111.0	105.1					
G80.0	96.7	104.2	118.2	105.1	96.7					
G81.0	87.4	96.4	111.9	99.2	87.4					
G82.0	75.5	86.8	103.9	91.6	75.5					
G83.0	60.9	74.4	95.3	83.6	60.9					
G84.0	44.3	59.4	84.5	73.5	44.3					
G85.0	29.6	40.6	70.3	59.8	29.6					
G86.0	14.8	20.0	54.3	44.1	14.8					
G87.0	2.9	3.1	37.3	26.5	2.9					
G88.0	1.1	0.9	18.6	4.6	1.1					
G89.0	0.6	0.6	3.9	1.3	0.6					
G90.0	0.6	0.6	1.4	0.5	0.6					
G91.0	0.6	0.6	0.5	0.5	0.6					
G92.0	0.6	0.6	0.5	0.6	0.6					
G93.0	0.6	0.6	0.5	0.5	0.6					
G94.0	0.7	0.6	0.5	0.5	0.7					
G95.0	0.8	0.7	0.5	0.6	0.8					
G96.0	0.7	0.7	0.5	0.6	0.7					
G97.0	0.7	0.7	0.5	0.5	0.7					
G98.0	0.8	0.8	0.6	0.6	0.8					
G99.0	0.8	0.8	0.6	0.6	0.8					
G100.0	0.9	0.9	0.6	0.7	0.9					
G101.0	0.9	0.9	0.6	0.7	0.9					
G102.0	0.9	0.9	0.7	0.8	0.9					
G103.0	0.9	0.9	0.7	0.8	0.9					
G104.0	1.0	0.9	0.7	0.8	1.0					
G105.0	1.0	1.0	0.7	0.8	1.0					
G106.0	1.1	1.0	0.8	0.9	1.1					
G107.0	1.0	1.0	0.8	0.9	1.0					
G108.0	1.1	1.1	0.8	0.9	1.1					
G109.0	1.2	1.1	0.9	1.0	1.2					
G110.0	1.2	1.1	0.9	1.0	1.2					

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator: 张宇哲

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 6.490 m [K=1.0000]
Humidity:
Inspector:

Candlepower Table (Continue 3)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G111.0	1.2	1.2	1.0	1.0	1.2					
G112.0	1.2	1.2	1.0	1.1	1.2					
G113.0	1.3	1.3	1.0	1.1	1.3					
G114.0	1.3	1.3	1.1	1.2	1.3					
G115.0	1.3	1.3	1.1	1.2	1.3					
G116.0	1.4	1.4	1.1	1.3	1.4					
G117.0	1.4	1.4	1.1	1.3	1.4					
G118.0	1.4	1.4	1.2	1.3	1.4					
G119.0	1.4	1.4	1.2	1.3	1.4					
G120.0	1.5	1.4	1.3	1.4	1.5					
G121.0	1.5	1.5	1.3	1.4	1.5					
G122.0	1.5	1.5	1.3	1.4	1.5					
G123.0	1.5	1.6	1.4	1.5	1.5					
G124.0	1.5	1.5	1.4	1.4	1.5					
G125.0	1.6	1.6	1.4	1.5	1.6					
G126.0	1.6	1.6	1.4	1.5	1.6					
G127.0	1.7	1.6	1.5	1.6	1.7					
G128.0	1.7	1.7	1.5	1.6	1.7					
G129.0	1.7	1.7	1.5	1.5	1.7					
G130.0	1.7	1.7	1.5	1.6	1.7					
G131.0	1.7	1.8	1.5	1.6	1.7					
G132.0	1.8	1.8	1.6	1.7	1.8					
G133.0	1.7	1.8	1.5	1.6	1.7					
G134.0	1.8	1.8	1.6	1.7	1.8					
G135.0	1.8	1.8	1.5	1.7	1.8					
G136.0	1.8	1.8	1.6	1.7	1.8					
G137.0	1.9	1.9	1.6	1.8	1.9					
G138.0	1.9	1.9	1.7	1.7	1.9					
G139.0	1.9	1.9	1.7	1.8	1.9					
G140.0	1.9	1.9	1.7	1.8	1.9					
G141.0	1.9	1.9	1.7	1.8	1.9					
G142.0	1.9	1.9	1.7	1.8	1.9					
G143.0	1.9	1.9	1.7	1.9	1.9					
G144.0	2.0	2.0	1.8	1.8	2.0					
G145.0	1.9	2.0	1.8	1.9	1.9					
G146.0	2.0	2.0	1.9	1.9	2.0					
G147.0	2.0	2.0	1.9	2.0	2.0					

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator: 张宇哲

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 6.490 m [K=1.0000]
Humidity:
Inspector:

Candlepower Table (Continue 4)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G148.0	2.0	2.0	1.9	1.9	2.0					
G149.0	2.0	2.0	1.9	2.0	2.0					
G150.0	2.0	2.0	1.9	2.0	2.0					
G151.0	2.0	2.0	1.9	2.0	2.0					
G152.0	2.0	2.1	2.0	2.0	2.0					
G153.0	2.1	2.1	1.9	2.0	2.1					
G154.0	2.1	2.0	2.0	2.0	2.1					
G155.0	2.1	2.1	2.0	2.1	2.1					
G156.0	2.1	2.1	2.0	2.1	2.1					
G157.0	2.1	2.1	2.0	2.1	2.1					
G158.0	2.1	2.1	2.0	2.1	2.1					
G159.0	2.1	2.2	2.1	2.0	2.1					
G160.0	2.1	2.2	2.0	2.1	2.1					
G161.0	2.1	2.1	2.1	2.2	2.1					
G162.0	2.2	2.2	2.1	2.1	2.2					
G163.0	2.1	2.2	2.1	2.2	2.1					
G164.0	2.1	2.2	2.1	2.2	2.1					
G165.0	2.1	2.2	2.1	2.2	2.1					
G166.0	2.2	2.2	2.2	2.2	2.2					
G167.0	2.2	2.2	2.1	2.2	2.2					
G168.0	2.2	2.2	2.2	2.3	2.2					
G169.0	2.2	2.2	2.2	2.3	2.2					
G170.0	2.2	2.2	2.2	2.3	2.2					
G171.0	2.2	2.3	2.2	2.3	2.2					
G172.0	2.2	2.2	2.2	2.2	2.2					
G173.0	2.2	2.3	2.2	2.3	2.2					
G174.0	2.2	2.2	2.2	2.3	2.2					
G175.0	2.3	2.3	2.2	2.3	2.3					
G176.0	2.2	2.3	2.3	2.3	2.2					
G177.0	2.2	2.3	2.2	2.3	2.2					
G178.0	2.3	2.3	2.2	2.3	2.3					
G179.0	2.2	2.2	2.2	2.3	2.2					
G180.0	2.2	2.3	2.3	2.3	2.2					

C Plane (°):0.0-360.0: 90.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator: 张宇哲

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 6.490 m [K=1.0000]
 Humidity:
 Inspector:

LED Average Luminance Report

Avg.L	cd/m ²
L 0-180(65) av	32801.23
L 0-180(75) av	42056.46
L 0-180(85) av	45986.04
L 90-270(65) av	31964.36
L 90-270(75) av	40688.40
L 90-270(85) av	46197.68
L 45(65) av	32382.80
L 45(75) av	41372.43
L 45(85) av	46091.86

Standard: GB/T 29293-2012