


Please consult your electrician for hanging fixture and wiring.

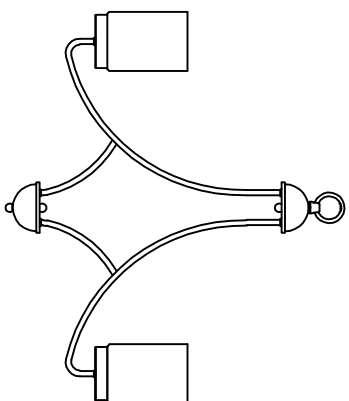

The fixture is designed to dim with a standard Triac forward phase dimmer. Dimming levels will vary by dimmer.

Below is a list of recommended dimmers:

- Lutron MACL-153M
- Lutron DVL-153P
- Lutron SCL-153P
- Levitron IPL06-10Z
- Levitron 6674-POW

Due to Inrush current, wattage should not exceed 150 Watts of product for a 600W dimmer.


WARNING: Wires need to be connected to driver found in canopy and should not be connected directly to power source or a short may occur.

33W LED 3000K DIMMABLE

Locate all hardware & components before discarding packaging
Cleaning & Care:
Clean with soft cloth and a mild detergent.
DO not use abrasive cleaner.

PRODUCTS ARE NOT INTENDED FOR COMMERCIAL USE.

CAUTION: Turn off the main power at the circuit breaker before installing and servicing the fixture to prevent possible injury from electric shock.
All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections, obtain the services of a qualified electrician.

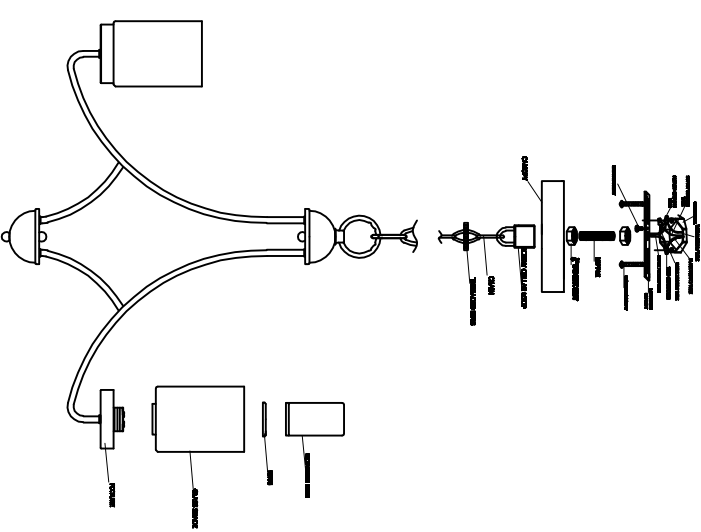

1. Remove MOUNTING BRACKET from fixture and install to electrical box. HEX NUTS are preset and can be adjusted for installation. Press CANOPY to ceiling so it is flush and SCREW COLLAR LOOP is aligned to the midpoint of the threads where it meets the canopy surface.
2. Attach appropriate amount of CHAIN to FIXTURE LOOP to achieve desired mounting height. Thread wire through every 3rd loop of chain.
3. Remove THREADED RING from the SCREW COLLAR LOOP and slide down CHAIN. Place CANOPY onto CHAIN and install CHAIN to SCREW COLLAR LOOP. Use THREADED RING to make CANOPY flush with the ceiling.
4. Wires must be connected to driver found inside canopy. Wire driver trip wires to supply wires in outlet box. Green wire is for Ground.
5. Slide GLASS over socket and secure using RING spacer and frosted glass diffuser's SOCKET RING.

PRODUCTS ARE NOT INTENDED FOR COMMERCIAL USE.