


PRODUCT NAME: Diverse
ITEM NUMBER: 57622 57624 57625 57627

Please consult your electrician for hanging fixture and wiring.



To prevent water intrusion, caulk around back-plate where fixture meets the wall using outdoor silicone sealant.

The fixture is designed to dim with an Electronic Low Voltage or Triac forward phase dimmer. Dimming levels will vary by dimmer. Below is a list of recommended dimmers:

Lutron SAEV-153P	Leviton IPL06-10Z
Lutron SCI-153P	Leviton 6674-POW
Lutron DVL-153P	Legrand Tru-Universal ADTP708TUW4
Lutron DVELV-330P	Leviton IPL06-10Z
Lutron MACL-153M	Leviton 6674-POW
Lutron MAELV-600M	

Due to inrush current wattage should not exceed 150 watts of product for a 600 watt dimmer.

57622:12W LED 2700K	DIMMABLE
57624:12W LED 3000K	DIMMABLE
57625:15W LED 2700K	DIMMABLE
57627:15W LED 3000K	DIMMABLE


PRODUCTS ARE NOT INTENDED
FOR COMMERCIAL USE.

MADE IN CHINA
Page 1 of (2)



PRODUCT NAME: Diverse
ITEM NUMBER: 57622 57624 57625 57627

CAUTION: Turn off the main power at the circuit breaker before installing and servicing the fixture to prevent possible injury from electric shock.
All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections, obtain the services of a qualified electrician.

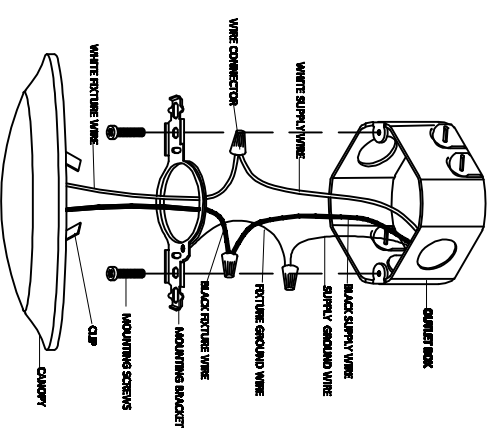

- For wet locations, use gasket along edge of the fixture.
1. Remove mounting bracket from fixture and install to electrical box.
 2. Wire fixture to wires in outlet box. Connect the black wire from the fixture to live wire, connect the white wire from the fixture to the neutral wire. Bare wire is for Grounding. Wrap connections with electrical tape to ensure for a more secure connection.
 3. Install fixture to bracket by pressing the clips on the fixture to the mounting bracket.

PRODUCTS ARE NOT INTENDED
FOR COMMERCIAL USE.

MADE IN CHINA
Page 2 of (2)