


SPEC 5CCT | Bath Vanity

52050 / 52052 / 52054

- Squared acrylic lens
- 27-30-35-40-50K Color Temperature
- CRI 90+
- Dimmable with ELV dimmers at 120V
- Damp Location
- 120-277V input
- Title 24


Job Name : _____
 Job Type : _____
 Quantity : _____
 Comments : _____

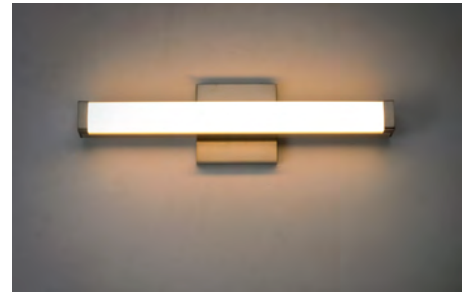

PRODUCT DESCRIPTION

This minimalistic contemporary approach to LED vanity lighting in a square profile matte white acrylic diffuser is a standard for both residential and commercial applications. The LED light engine features a smooth dimming driver with range voltage input for flexibility in project applications. The ample lighting and high color rendering index of the LEDs make this sconce the ultimate choice for vanity lighting. A 5-color toggle switch is accessible to adjust the color of the LED between warm 2700K to multiple neutral color tones and a bright 5000K making the collection complete in its offering for a variety of applications.

- Always consult a qualified electrician before installing any lighting product

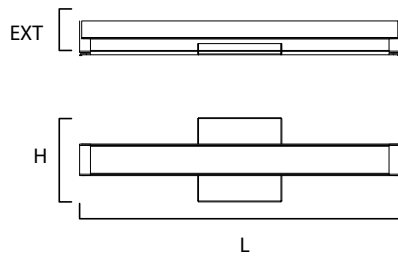

MODEL	DIMENSION	BULB TYPE	CRI	LUMENS INIT DEL	COL TEMP.	DIMMABLE	INPUT
52050	18"W x 4.75"H x 2.75"Ext.	12W LED (Integrated)	90	1140 880	27-30-35-40-50K	Triac/ELV at 120V	120V-277
52052	24"W x 4.75"H x 2.75"Ext.	16W LED (Integrated)	90	1520 1250	27-30-35-40-50K	Triac/ELV at 120V	120V-277
52054	30"W x 4.75"H x 2.75"Ext.	20W LED (Integrated)	90	1900 1550	27-30-35-40-50K	Triac/ELV at 120V	120V-277

FINISHES OPTIONS:

- Black (BK)
- Natural Aged Brass (NAB)
- Polished Chrome (PC)
- Satin Nickel (SN)

MATERIAL:

Aluminum, Acrylic

AVAILABLE SIZES:

18" | 24" | 30"

RATINGS:

cETLus
 Damp Location
 Title 24
 ADA



ADDITIONAL:

INSTALL UP/DOWN: All
 RATED LIFE 50000 Hours OPERATING
 TEMPERATURE:
 -20°C (-4°F), 40°C (104°F)

PHOTOMETRIC: Report Found Online



WESTERN DISTRIBUTION CENTER (HEADQUARTER)
 253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746
EASTERN DISTRIBUTION CENTER
 101 GARDNER PARK | PEACHTREE CITY, GA 30269
 P. 626.956.4200 | F. 626.956.4225 | maximlighting.com