


WAFER 0-10V | LED SURFACE MOUNT

57715 | 58711 | 58713 | 58715 | 58737 | *58780 | *58784

- Range Voltage Input 120-277V
- Die Cast Aluminum frame
- Edge Lit LED technology
- T24 Options
- Patented Driver **WO2022166960A1** Installation on select models
- For Dimmer information: See Dimming Compatibility Chart

Job Name : _____
 Job Type : _____
 Quantity : _____
 Comments : _____




58780WT
7" Empty Shell



***58784WTWT**
Wafer LED 7"
Emergency Back Up

PRODUCT DESCRIPTION

Wafer was designed for the discriminate consumer who wants the low profile look of recessed without the high cost. Manufactured of die cast aluminum, Wafer brings ultimate heat dissipation to its edge lit technology. Edge lighting gives very even light distribution while dispersing heat over a larger area. The result of this is longer LED life and better light diffusion.

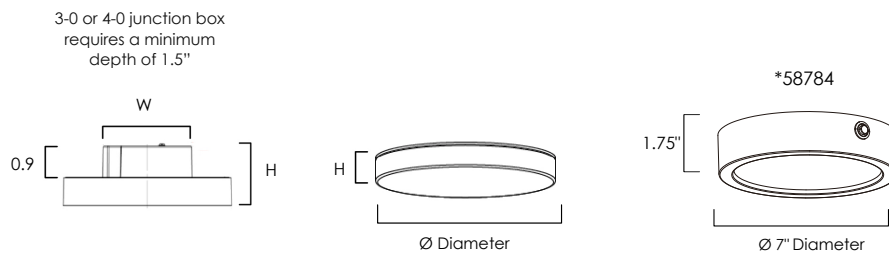

FINISHES OPTIONS:

White (WT) 

Satin Nickel (SN) 

MATERIAL:

Aluminum
Polycarbonate Lens

AVAILABLE SIZES: *NOMINAL

5" | 7" | 9" | 10" | 15"

RATINGS:

cETLus Wet Location
Title 24 JA8 Compliant
ADA extension
Dimmable



ADDITIONAL:

RATED LIFE: 50,000 Hours
OPERATING TEMP: -20° C (-4°), 40°C
(104°F) PHOTOMETRIC: Reports Available
Patented Technology:
WO2022166960A1 in 9" and above

MEASUREMENTS

LAMPING

| MODEL | DIMENSION | BULB TYPE | CCT | CRI | LUMENS | | DIMMABLE | V INPUT |
|--------|---------------|--------------------|-------|-----|--------|-----------|----------|----------|
| | | | | | RATED | DELIVERED | | |
| 58711 | 5.5"Ø x 0.5"H | 10W Integrated LED | 3000K | 90+ | 750 | 640 | 0-10V | 120-277V |
| 58713 | 7"Ø x 0.5"H | 15W Integrated LED | 3000K | 90+ | 1250 | 1100 | 0-10V | 120-277V |
| 58715 | 9"Ø x 0.5"H | 20W Integrated LED | 3000K | 90+ | 2000 | 1600 | 0-10V | 120-277V |
| 57715 | 10"Ø x 0.5"H | 20W Integrated LED | 3000K | 90+ | 1200 | 1200 | 0-10V | 120-277V |
| 58737 | 15"Ø x 0.5"H | 30W Integrated LED | 4000K | 90+ | 3000 | 2500 | 0-10V | 120-277V |
| *58784 | 7"Ø x 1.5"H | 17W Integrated LED | 3000K | 90+ | 1250 | 1150 | 0-10V | 120-277V |

*EMERGENCY BACK UP MODEL. MINIMUM 15 HOURS FOR FULL CHARGE. LASTS 1.5 HOURS ON BATTERY

Always consult a qualified electrician before installing any lighting product



WESTERN DISTRIBUTION CENTER (HEADQUARTER)

253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746

EASTERN DISTRIBUTION CENTER

101 GARDNER PARK | PEACHTREE CITY, GA 30269

P. 626.956.4200 | F. 626.956.4225 | maximlighting.com