

WAFER LED LINEAR I SURFACE MOUNT

57742 / 57743


- Edge-Lit Technology
- Aluminum extruded body for better heat dissipation
- Available in 3000K / 4000K color temperature
- Approved for use in closets and storage spaces
- Suitable for Closets according to NEC Section 410.8 & 410.16
- Dimmable with ELV dimmer at 120V
- 120-277 Input Voltage
- Easy to install: Fits 4" Outlet Box
- Not recommended for pancake box
- Suitable for Wet location
- ETL/cETL IP65

Job Name : _____
 Job Type : _____
 Quantity : _____
 Comments : _____



PRODUCT DESCRIPTION

Wafer was designed for the discriminate consumer who wants the low profile look of recessed without the high cost. Manufactured of die cast aluminum, Wafer brings ultimate heat dissipation to its edge lit technology. Edge lighting gives very even light distribution while dispersing heat over a larger area. The result of this is longer LED life and better light diffusion.

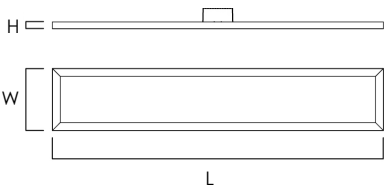

MEASUREMENTS

DIMENSIONS : 24"L x 4.5"W x 0.5"H
 HANGING WEIGHT : 1.98 lb MAX OH : 0.5"
 HCO : 0.5" MIN OH : 0.5"
 BP Width : 4.1"

LAMPING

INPUT VOLTAGE : 120-277V
 BULB : 18W PCB LED (Integrated)
 DIMMABLE : ELV Dimmer at 120V
 CRI : 90+

Model	Color Temp.	Lumens
57742	3000K	1300
57743	4000K	1600

FINISHES OPTIONS:

White (WT)



MATERIAL:

Aluminum
 PMMA Acrylic Diffuser

RATINGS:

Closets Rated: NEC 410.8 & 410.16
 ETL/cETL IP65
 Wet Location



ADDITIONAL:

RATED LIFE: 50,000 Hours
 OPERATING TEMP: -20° C (-4°), 40°C (104°F)
 PHOTOMETRIC: Report Found Online

Always consult a qualified electrician before installing any lighting product



WESTERN DISTRIBUTION CENTER (HEADQUARTER)
 253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746

EASTERN DISTRIBUTION CENTER
 4200 SHIRLEY DR. | ATLANTA, GA 30336

P. 626.956.4200 | F. 626.956.4225 | maximlighting.com