

COVE I Recessed Downlight

57792 / 57793 / 57794 / 57796 / 57797 / 57798


- LED 3000K or 4000K Options
- 4 inch and 6 inch Recessed Can Substitute
- UL Outlet Box fitted on fixture
- Dimmable with Triac Dimmer
- Good for new construction and remodels
- Suitable for closets according to NEC Section 410.8 & 410.16
- Indirect lighting into cove for soft-even illumination
- IC-Rated for direct contact with insulation
- Damp Location Rated
- Title 24
- ETL/cETL
- CRI 90+

Job Name : _____
 Job Type : _____
 Quantity : _____
 Comments : _____



PRODUCT DESCRIPTION

Maxim's Cove recessed downlight series offers an IC Airtight UL rated Outlet Box that is fitted to the fixture for easy installation without the use of a recessed housing. To reduce glare that is associated with other recessed downlights, the Cove uses an innovative concave lens that directs the light upward and is then reflected back down offering even and abundant illumination. The Cove is one of the most versatile downlights in the market.

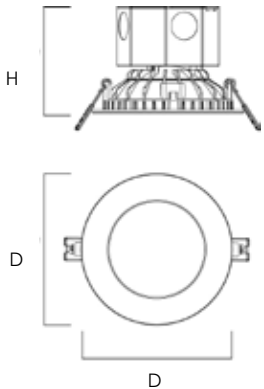

MEASUREMENTS

MODEL DIMENSION

57792	4.75"D x 3.25"H
57793	4.75"D x 3.25"H
57794	4.75"D x 3.25"H
57796	6.75"D x 3.75"H
57797	6.75"D x 3.75"H
57798	6.75"D x 3.75"H

BP HEIGHT HCO HANGING WEIGHT

1.85"H	3.30"	0.55 lb
1.85"H	3.30"	0.55 lb
1.85"H	3.30"	0.55 lb
1.85"H	3.80"	0.77 lb
1.85"H	3.30"	0.77 lb
1.85"H	3.80"	0.77 lb

LAMPING

MODEL BULB TYPE

57792	12K D7 6 @98 fIntegratd	90+	620	3000K	Triac CL	120V
57793	12W PCB LED (integrated)	90+	620	4000K	Triac CL	120V
57794	9W PCB LED (integrated)	90+	540	3000K	Triac CL	120V
57796	12W PCB LED (integrated)	90+	720	3000K	Triac CL	120V
57797	15K D7 6 @98 fIntegratd	90+	950	3000K	Triac CL	120V
57798	15K D7 6 @98 fIntegratd	90+	950	4000K	Triac CL	120V

CRI LUMENS COL TEMP. DIMMABLE INPUT

90+	620	3000K	Triac CL	120V
90+	620	4000K	Triac CL	120V
90+	540	3000K	Triac CL	120V
90+	720	3000K	Triac CL	120V
90+	950	3000K	Triac CL	120V
90+	950	4000K	Triac CL	120V

FINISHES OPTIONS:

White (WT)



MATERIAL:

Aluminum

AVAILABLE SIZES:

4" | 6"

RATINGS:

- ETL/cETL
- IC Airtight
- Damp Location
- Title 24
- Closets Rated: NEC 410.8 & 410.16



ADDITIONAL:

- RATED LIFE: 40,000 Hours
- OPERATING TEMP: -20° C (-4°), 40° C (104° F)
- PHOTOMETRIC: Report Found Online
- LIGHTING DIRECTION: Down

Always consult a qualified electrician before installing any lighting product



WESTERN DISTRIBUTION CENTER (HEADQUARTER)
 253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746

EASTERN DISTRIBUTION CENTER
 4200 SHIRLEY DR. | ATLANTA, GA 30336

P. 626.956.4200 | F. 626.956.4225 | maximlighting.com