



# WAFER | LED SURFACE MOUNT

58710 | 58712 | 58714 | 58736 | 58810 | 58812 | 58814

\*58780 | \*58784

- Range Voltage Input 120-277V
- Die Cast Aluminum frame
- Edge Lit LED technology
- Patented Driver **WO2022166960A1** Installation on select models
- For Dimmer information: See Dimming Compatibility Chart

Job Name : \_\_\_\_\_  
 Job Type : \_\_\_\_\_  
 Quantity : \_\_\_\_\_  
 Comments : \_\_\_\_\_

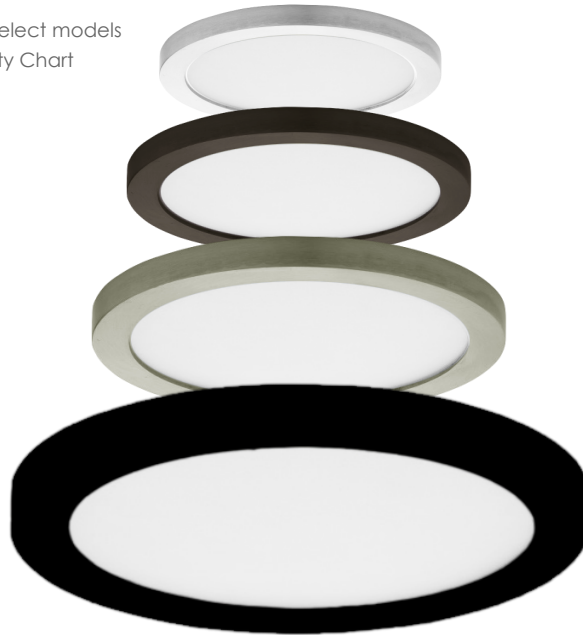

**58780WT**  
7" Empty Shell



**58784WTWT**  
Wafer LED 7"  
Emergency Back Up






**MSC8766**  
Mud-in Ring

## PRODUCT DESCRIPTION

Wafer was designed for the discriminate consumer who wants the low profile look of recessed without the high cost. Manufactured of die cast aluminum, Wafer brings ultimate heat dissipation to its edge lit technology. Edge lighting gives very even light distribution while dispersing heat over a larger area. The result of this is longer LED life and better light diffusion.

3-0 or 4-0 junction box requires a minimum depth of 1.5"

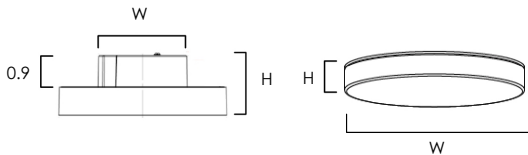


## FINISHES OPTIONS:

White (WT)

Bronze (BZ)

Satin Nickel (SN)

Black (BK)



## MATERIAL:

Aluminum  
Polycarbonate Lens

## AVAILABLE SIZES: \*NOMINAL

5" | 7" | 9" | 15"

## RATINGS:

cETLus Wet Location  
Title 24  
JA8 Compliant  
ADA extension  
Dimmable



## ADDITIONAL:

RATED LIFE: 50,000 Hours  
OPERATING TEMP: -20° C (-4°), 40° C (104° F) PHOTOMETRIC: Reports Available  
Patented Technology:  
WO2022166960A1 in 9" and above

## MEASUREMENTS

## LAMPING

| MODEL   | DIMENSION      | BULB TYPE          | CCT   | CRI | LUMENS |           | DIMMABLE | V INPUT  |
|---------|----------------|--------------------|-------|-----|--------|-----------|----------|----------|
|         |                |                    |       |     | RATED  | DELIVERED |          |          |
| 58710   | 5.5"W x 0.5"H  | 10W Integrated LED | 3000K | 90+ | 930    | 700       | ELV      | 120-277V |
| 58810   | 5.5"W x 0.5"H  | 10W Integrated LED | 4000K | 90+ | 930    | 750       | ELV      | 120-277V |
| 58712   | 7"W x 0.5"H    | 15W Integrated LED | 3000K | 90+ | 1250   | 1150      | ELV      | 120-277V |
| 58812   | 7"W x 0.5"H    | 15W Integrated LED | 4000K | 90+ | 1500   | 1200      | ELV      | 120-277V |
| 58714   | 9"W x 0.5"H    | 20W Integrated LED | 3000K | 90+ | 2100   | 1650      | ELV      | 120-277V |
| 58814   | 9"W x 0.5"H    | 20W Integrated LED | 4000K | 90+ | 2200   | 1700      | ELV      | 120-277V |
| 58736   | 15"W x 0.5"H   | 30W Integrated LED | 3000K | 90+ | 3000   | 2500      | ELV      | 120-277V |
| *58784  | 7"W x 1.5"H    | 17W Integrated LED | 3000K | 90+ | 1250   | 1150      | 0-10V    | 120-277V |
| MSC8766 | 4.25"W x 0.5"H |                    |       |     |        |           |          |          |

\*EMERGENCY BACK UP MODEL. MINIMUM 15 HOURS FOR FULL CHARGE. LASTS 1.5 HOURS ON BATTERY

Always consult a qualified electrician before installing any lighting product



## WESTERN DISTRIBUTION CENTER (HEADQUARTER)

253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746

## EASTERN DISTRIBUTION CENTER

101 GARDNER PARK | PEACHTREE CITY, GA 30269

P. 626.956.4200 | F. 626.956.4225 | maximlighting.com