SLIM FIRE | RECESSED - FLAT 5CCT

67714 / 67716 / MSC6770AL

- 2-Hour Fire Protection

Job Name : _____
Job Type : _____
Quantity : _____
Comments : _____





67714




67716

ACCESSORIES




MSC6770AL
Slim Mounting Bracket
*Not compatible
with **67755**

Slim

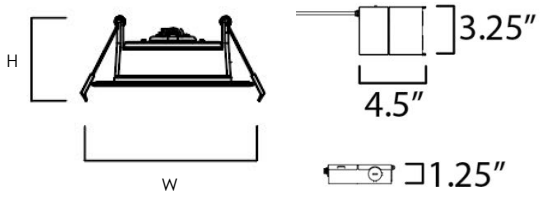

Trim Ring



MEASUREMENTS

MODEL	DIMENSION
67714	5.5"W x 2.75"H
67716	7.5"W x 2.75"H
MSC6770AL	14.5"W x 1.75"H

LAMPING

BULB TYPE	COL TEMP.	LUMENS DEL.	DIMMABLE	INPUT	CRI
11W DC Integrated LED	27-30-35-40-50K	910	ELV & Triac CL	120V AC	90
12W DC Integrated LED	27-30-35-40-50K	1000	ELV & Triac CL	120V AC	90

FINISHES OPTION

White (WT)

GLASS
White WT

MATERIAL
Steel, Aluminum

RATINGS
cETLus
Wet Location
CA Title 24

ADDITIONAL
INSTALL UP/DOWN: Up
RATED LIFE 50000 Hours
OPERATING TEMPERATURE:
-20°C (-4°F), 40°C (104°F)

Always consult a qualified electrician before installing any lighting product.

MAXIM LIGHTING®

WESTERN DISTRIBUTION CENTER (HEADQUARTER)
253 NORTH VINELAND AVE I CITY OF INDUSTRY, CA 91746

EASTERN DISTRIBUTION CENTER
101 GARDNER PARK | PEACHTREE CITY, GA 30269

P. 626.956.4200 I F. 626.956.4225 I maximlighting.com