CRISP | SURFACE MOUNT LED

87661 / 87663 / 87664 / 87665 / 87674

- Surface MT Install, Recessed appearance Patent Pending
- Dimmable 3000K or 5CCT Select models
- Accessible CCT Select toggle on surface
- Mount on 4" octagonal or remodel junction box, Min 1.5" Depth
- Suitable for use in closets when installed in accordance to NEC®Section 410.16 (A)(1) and 410.16 (C)(1)
- High-powered LED output creates brighter shine
- 1000 Lumens Delivered
- For Residential Use







87663WT, BK



Job Name: __ Job Type : _____ Quantity Comments:










MSC8766 Mud-in Ring

PRODUCT DESCRIPTION

High performance and high in style, the Crisp is constructed like a surface mount that can install into a variety of 4-0 junction boxes while designed with a recessed appearance. The fixtures almost impossibly slopes into the junction box with snap in trims in a variety of styles. Purchase the mud-in ring assembly kit and you can opt for a trim-less design. Not only good-looking, each unit also delivers over 1000 lumens providing ample lighting. With its concave design, the light source is obscured from the finished ceiling surface thereby reducing glare. Available in warm 3000K single CCT or 5CCT selectable with an accessible switch behind the faceplate so you can set your preferred light temperature without removing the light from the junction box..

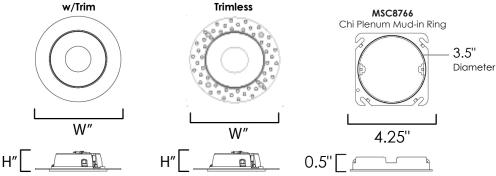

LAMPING **MEASUREMENTS**

MODEL	DIMENSION
87661	RD 3.75"W x 1.25"H
87663	RD 3.75"W x 1.25"H
87664	RD 5"W x 1.5"H
87665	RD 5"W x 1.5"H
87674	SQ 5"W x 1.5"H
MSC8766	SQ 4.25"W x 0.5"H

	COL	LUMENS			
BULB TYPE	TEMP.	DEL.	DIMMABLE	INPUT	CRI
12W AC Integrated LED	3000K	1000	Triac CL	120V	90
12W AC Integrated LED	27-30-35-40-50k	(1000	Triac CL	120V	90
12W AC Integrated LED	3000K	1000	Triac CL	120V	90
12W AC Integrated LED	27-30-35-40-50k	(1000	Triac CL	120V	90
12W AC Integrated LED	3000K	1000	Triac CL	120V	90
_					

FINISHES OPTION



GLASS

White WT

MATERIAL

Die Cast Aluminum, Steel, Acrylic

RATINGS

cETLus Wet Location CA Title 24/JA8 **Energy Star**










ADDITIONAL

RATED LIFE 50000 Hours OPERATING TEMPERATURE: -20°C (-4°F), 40°C (104°F)

PHOTOMETIC: Report Found Online





WESTERN DISTRIBUTION CENTER (HEADQUARTER) 253 NORTH VINELAND AVE I CITY OF INDUSTRY, CA 91746