


PRODUCT NAME: Novus 5 Light Chandelier
ITEM NUMBER: 21585

Please consult your electrician for hanging fixture and wiring.

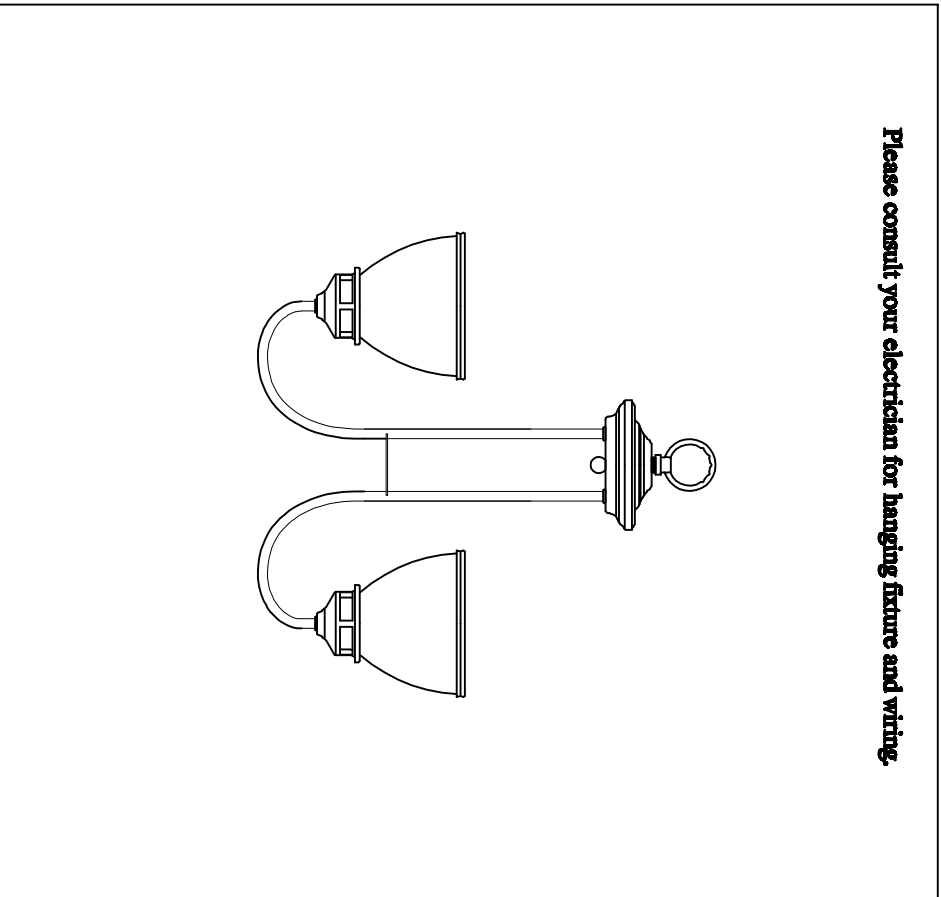

5-#E26-40W (NO INCLUDED BULB)

**Locate all hardware & components before discarding packaging
Cleaning & Care:**


**Clean with soft cloth and a mild detergent.
DO not use abrasive cleaner.**

**PRODUCTS ARE NOT INTENDED
FOR COMMERCIAL USE.**

**MADE IN CHINA
Page 1 of (2)**

PRODUCT NAME: Novus 5 Light Chandelier
ITEM NUMBER: 21585

CAUTION: Turn off the main power at the circuit breaker before installing and servicing the fixture to prevent possible injury from electric shock.
All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards.
If you are unfamiliar with proper electrical wiring connections, obtain the services of a qualified electrician.

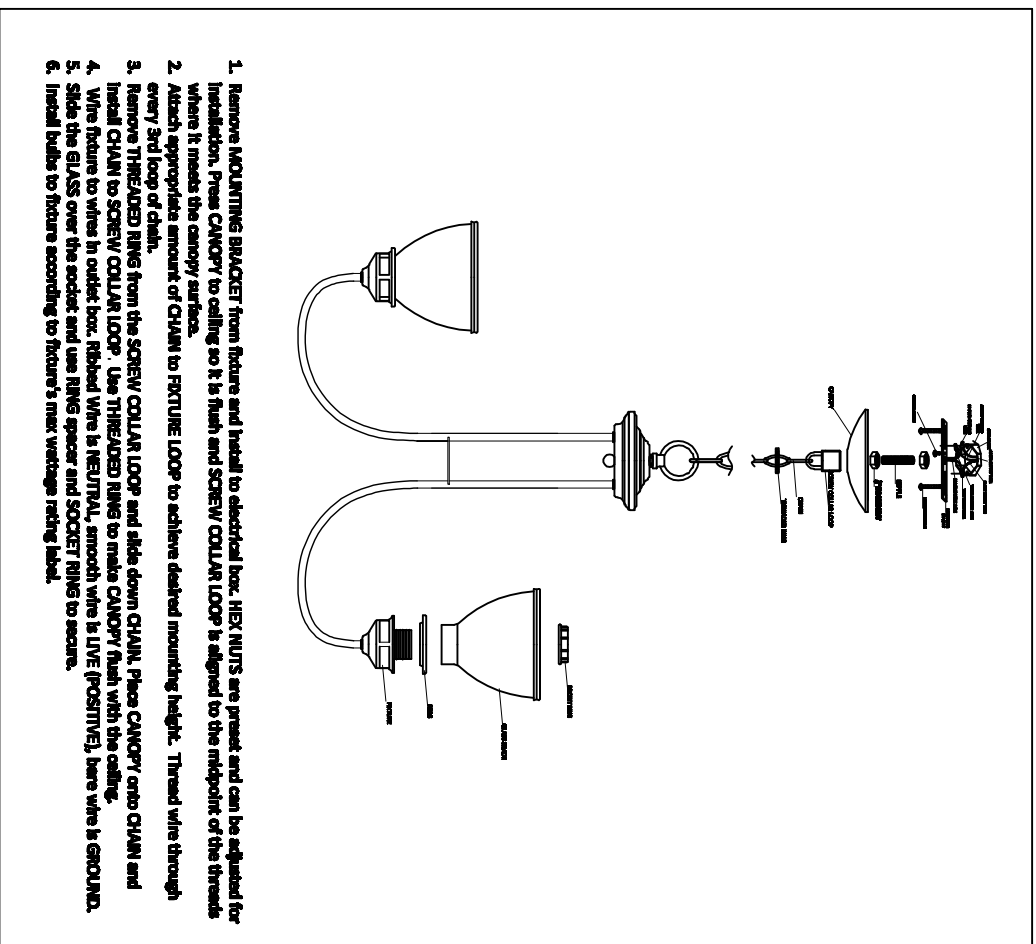

1. Remove **MOUNTING BRACKET** from fixture and install to electrical box. **HIX NUTS** are present and can be adjusted for installation. Press **CANOPY** to ceiling so it is flush and **SCREW COLLAR LOOP** is aligned to the midpoint of the threads where it meets the canopy surface.
2. Attach appropriate amount of **CHAIN** to **FRITURE LOOP** to achieve desired mounting height. Thread wire through every 3rd loop of chain.
3. Remove **THREADED RING** from the **SCREW COLLAR LOOP** and slide down **CHAIN**. Place **CANOPY** onto **CHAIN** and install **CHAIN** to **SCREW COLLAR LOOP**. Use **THREADED RING** to make **CANOPY** flush with the ceiling.
4. Wire fixture to wires in outlet box. **Red**ed wire is **NEUTRAL**, smooth wire is **LIVE** (**POSITIVE**), bare wire is **GROUND**.
5. Slide the **GLASS** over the socket and use **RING** spacer and **SOCKET RING** to secure.
6. Install bulbs to fixture according to fixture's max wattage rating label.

**PRODUCTS ARE NOT INTENDED
FOR COMMERCIAL USE.**

**MADE IN CHINA
Page 2 of (2)**