

Installation Instructions

53570,53571,53572,53574,53575 | StarStrand™ Spec Star
 E53570,E53571,E53572,E53574,E53575 | StarStrand™ Spec Star


1. Layout your installation prior to removing adhesive tape backing, Tape is available in multiple lengths to get to distance required, Although the tape can be cut every 4", connectors cannot be attached to cut ends, cut ends are for terminations of run only.
2. Make sure tape is disconnected from power supply. Install aluminum heat distribution bars to surface using flat head screws enclosed. Remove peel stick backing and carefully apply tape to aluminum bar. Failure to use aluminum heat distribution bar will void warranty.
3. Do not exceed maximum runs listed on chart on reverse side of these instructions, Connecting cords may be used between sections of tape when necessary. The length of the connecting cord does not affect maximum run. Maximum run distances listed are the length of tape only. Do not exceed distance of 12' between 2 sections of tape.

Model Number	Wattage	Maximum Run
53324	30	6'
53326	30	6'
53313, 53318	60	12'
53286, 53330	96	22'
53331	96	22'

4. All end terminations must be capped. Silicone end cap(53469) will terminate either cut or connector ends.
5. Connector pins are made of brass and care needs to be taken not to bend pins during installation.

SAMPLE LAYOUT

Using 53288 320w Direct Wire Driver with two output cords, placed in the middle of the run.

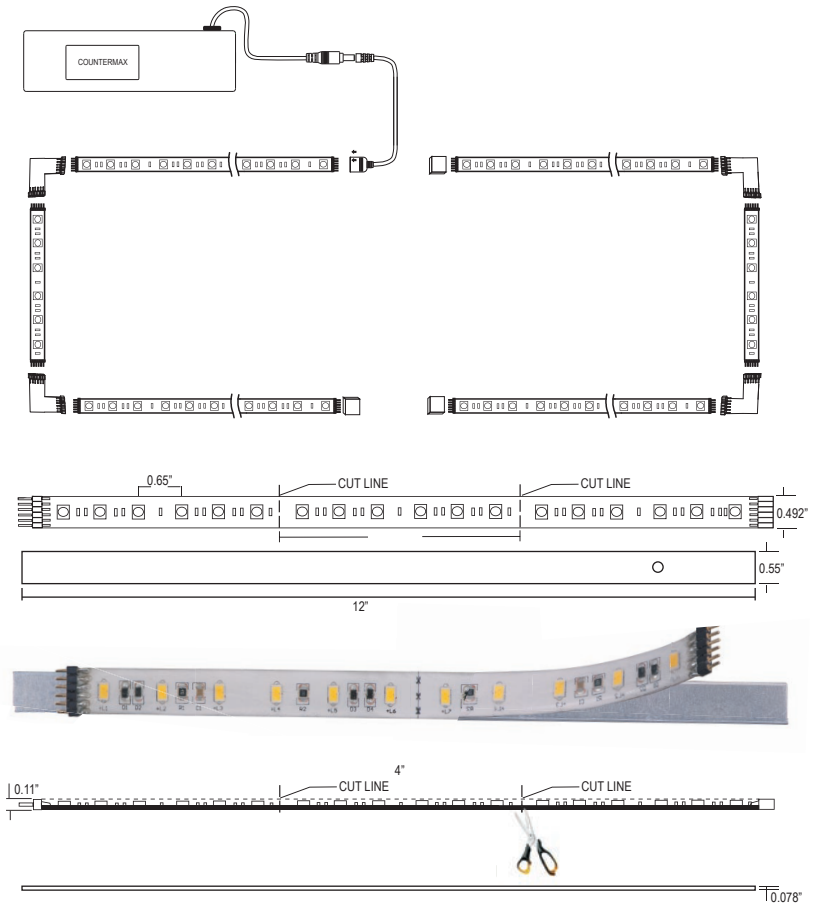

Maxim Lighting is a registered trademark and StarStand is a trademark of Maxim lighting International, Inc. All products, images, designs and logos are ©2010 Maxim Lighting International, Inc. All Rights Reserved.

For more information and customer service call (800)486-2946 or visit maximlighting.com



Installation Instructions

53570,53571,53572,53574,53575 | StarStrand™ Spec Star
E53570,E53571,E53572,E53574,E53575 | StarStrand™ Spec Star

Warrenty:

StarStrand™ LED Tape Lighting System components will be warranted for 5 years while the original purchaser owns it .Tape must be installed on aluminum heat distribution bar provided. Tape must be installed in a well ventilated space with ambient temperature that do not exceed 78 degrees Fahrenheit.

Maxim Lighting International will, at its election, repair, replace or make appropriate adjustment where Maxim Lighting International inspection discloses any such defects occurring in normal usage within five (5) years after date of shipment. Maxim Lighting International is not responsible for removal or installation costs. This warranty is limited to the repair or replacement of the product only and that Maxim Lighting International is not responsible for any labor incurred. Use of incorrect installation methods and/or bulb wattage will void the warranty.

To obtain warranty service contact Maxim Lighting International either through your Dealer, Contractor or E-tailer, or by writing Maxim Lighting International, Attn: Customer Service Department, 253 North Vineland Avenue, City of Industry, CA 95746, USA, or by calling 1-800-486-2946 from within the USA and 1-626-956-4200 outside of the USA..

DISCLAIMER OF IMPLIED WARRANTY

IMPLIED WARRANTIES INCLUDING THAT OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR

PURPOSE ARE EXPRESSLY LIMITED IN DURATION TO THE DURATION OF THIS WARRANTY. MAXIM LIGHTING INTERNATIONAL AND/OR SELLER DISCLAIMS ANY LIABILITY FOR SPECIAL, INCIDENTAL

OR CONSEQUENTIAL DAMAGES.

Some states/provinces do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of special, incidental or consequential damages, so these limitations and exclusions may not apply to you. This warranty gives you specific legal rights. You may also have other rights which vary from state/ province to state/province.



Maxim Lighting is a registered trademark and StarStrand is a trademark of Maxim Lighting International, Inc. All products, images, designs and logos are ©2010 Maxim Lighting International, Inc. All Rights Reserved.

For more information and customer service call (800)486-2946 or visit maximlighting.com