Path | 58004BK

Job Name:_____ Job Type:_____ Quantity:_____ Comments:_____








PRODUCT DESCRIPTION

Step and pathway lighting suitable for interior or exterior application. Designed to install into a single gang box and is line voltage so additional transformers are not needed. Available in Aluminum, White, Black, or Bronze and both horizontal wide beam or vertical narrow beam spread.

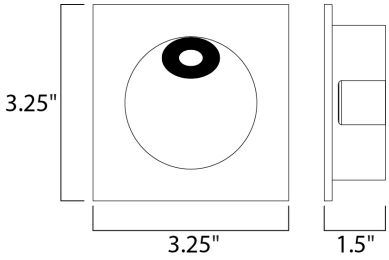

MEASUREMENTS

DIMENSION	: 3" W x 5" H x 1.75" Ext
HANGING WEIGHT	: 0.4 lb

LAMPING

INPUT VOLTAGE	: 120-277V
LUMENS	: 300 Rated (20 Del.)
BULB	: 1 x 3W LED DC Integrated , 3W Total
BULB INCLUDED	: (Integrated)
DIMMABLE	: Triac
CRI	: 80 CRI
COLOR_TEMP	: 30-40-65K

FINISHES OPTION

Black (BK)

White (WT)

MATERIAL

Aluminum

RATINGS

cETLus
Wet Location
ADA

ADDITIONAL

RATED LIFE 25000 Hours
OPERATING TEMPERATURE:
-20°C (-4°F), 40°C (104°F)

PHOTOMETIC: Report Found Online

Always consult a qualified electrician before installing any lighting product.

MAXIM® LIGHTING

WESTERN DISTRIBUTION CENTER (HEADQUARTER)
253 NORTH VINELAND AVE I CITY OF INDUSTRY, CA 91746

EASTERN DISTRIBUTION CENTER
101 GARDNER PARK | PEACHTREE CITY, GA 30269

P. 626.956.4200 I F. 626.956.4225 I maximlighting.com